

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.  
 Tooling Drawing NO.  
 USB A: TR00662

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	C	REVISE PER ECO-05-006320	01AUG05	TW JH

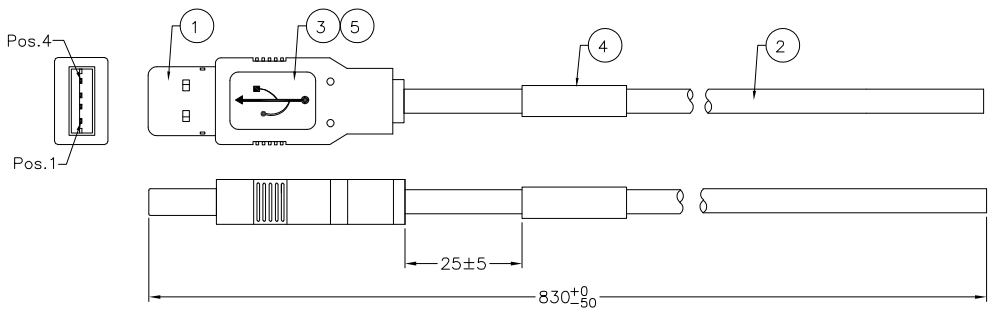

PIN ASSIGNMENT :

USB A	2	3	1	4	Shell
	Pair 1				
	White(D-)	Green(D+)	Red(Vbus)	Black(Grnd)	Drain Braid
	NC	NC	NC	NC	NC

- NOTES:
1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1000MM PER USB SPECIFICATIONS.
  5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

AR	MR	COPPER FOIL, W: 5MM	5
1	PC	LABEL, 25x35mm, White 25x13mm	4
AR	KG	Overmold PVC, 40P, Color: White(WH01)	3
AR	MR	USB 2.0 Cable 28AWG*1P+28AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	2
1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: BOVEY LIU 25FEB02	Tyco Electronics Corporation	
DIMENSIONS: mm		CHK: J.HUNT 25FEB02	Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J.HUNT 25FEB02	NAME: CABLE ASSEMBLY, USB A TYPE TO NC	
0 PLC ± -		PRODUCT SPEC	-	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT	-	
3 PLC ± -		SIZE	A3	
4 PLC ± -		CAGE CODE	00779	
ANGLES ± -		DRAWING NO	C=1487591	
FINISH		RESTRICTED TO	-	
MATERIAL		WEIGHT	-	
-		CUSTOMER DRAWING	SCALE	N.T.S
		SHEET	1	OF 1
		REV	C	