

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.
 Tooling Drawing NO.
 USB A: TR00662

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REVISE PER ECO-05-006320	01AUG05	TW	JH

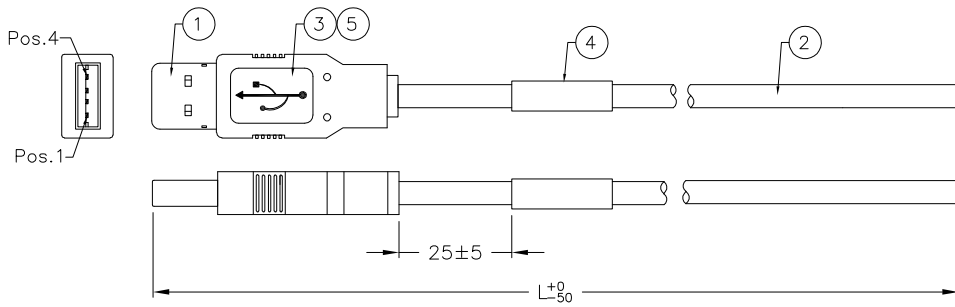

PIN ASSIGNMENT :

USB A	2	3	1	4	Shell
	Pair 1				
	White(D-)	Green(D+)	Red(Vbus)	Black(Gnd)	Drain Braid
	NC	NC	NC	NC	NC

PART NO.	1487593-1	1487593-2
LENGTH(L)	2000	1500

- NOTES:
- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
 - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
 - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
 - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 2700MM PER USB SPECIFICATIONS.
 - MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

AR	AR	MR	COPPER FOIL, W: 5MM	5
1	1	PC	LABEL, 25x35mm, White 25x13mm	4
AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	3
AR	AR	MR	USB 2.0 Cable 28AWG*1P+24AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	2
1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-2	-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN BOVEY LIU 25FEB02	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
0 PLC ± -	1 PLC ± -	CHK J.HUNT 25FEB02	
2 PLC ± -	3 PLC ± -	APVD J.HUNT 25FEB02	NAME CABLE ASSEMBLY, USB A TYPE TO NC
4 PLC ± -	ANGLES ± -	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
MATERIAL	FINISH	APPLICATION SPEC	A3 00779 C=1487593
		WEIGHT	CUSTOMER DRAWING SCALE N.T.S SHEET 1 OF 1 REV C