


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REVISE PER ECO-05-006320	01AUG05	TW	JH

Tooling Drawing NO.
 USB A: TR00662
 USB B: TR00664

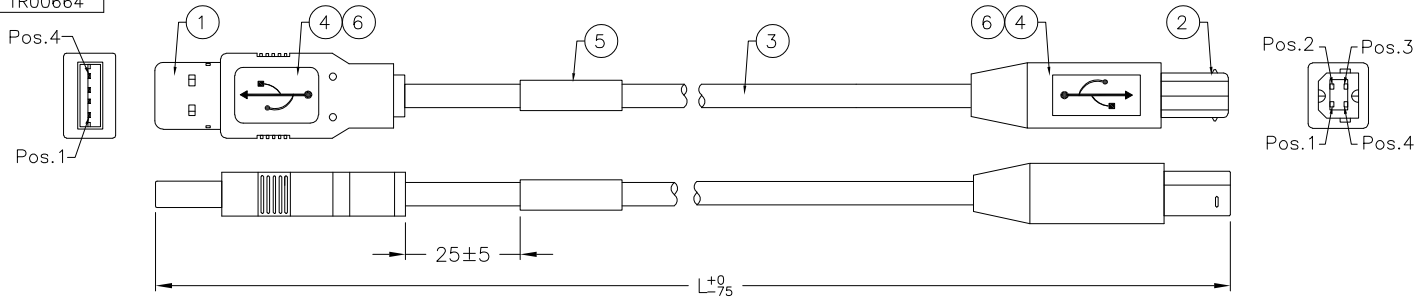

PIN ASSIGNMENT :

USB A	2	3	1	4	Shell
	Pair 1		Red(Vbus)	Black(Gnd)	Drain Braid
	White(D-)	Green(D+)			
USB B	2	3	1	4	Shell



PART NO.	1487598-1	1487598-2
LENGTH(L)	4000	5000

AR	AR	MR	COPPER FOIL, W: 5MM	6
1	1	PC	LABEL, 25x35mm, White 25x13mm	5
AR	AR	KG	Overmold PVC, 40P, Color: Black(BK01)	4
AR	AR	MR	USB 2.0 Cable 25AWG*1P+20AWG*2C+Al/MyIar +Drain+Braid, Color: Black(BK01).	3
1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-2	-1	U/M	DESCRIPTION	ITEM

- NOTES:
- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
 - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
 - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
 - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 5000MM PER USB SPECIFICATIONS.
 - MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN BOVEY LIU 25FEB02	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
0 PLC ± -	1 PLC ± -	CHK J.HUNT 25FEB02	NAME: CABLE ASSEMBLY, USB A TYPE TO USB B TYPE	
2 PLC ± -	3 PLC ± -	APVD J.HUNT 25FEB02	PRODUCT SPEC	
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1487598 RESTRICTED TO	
MATERIAL	FINISH	WEIGHT	SCALE: N.T.S. SHEET 1 OF 1 REV C	
		CUSTOMER DRAWING		