


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


Tooling Drawing NO.
 USB A: TR00662
 USB B: TR00664

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	D1	REVISED PER ECO-11-005033	23MAR11	RK HMR

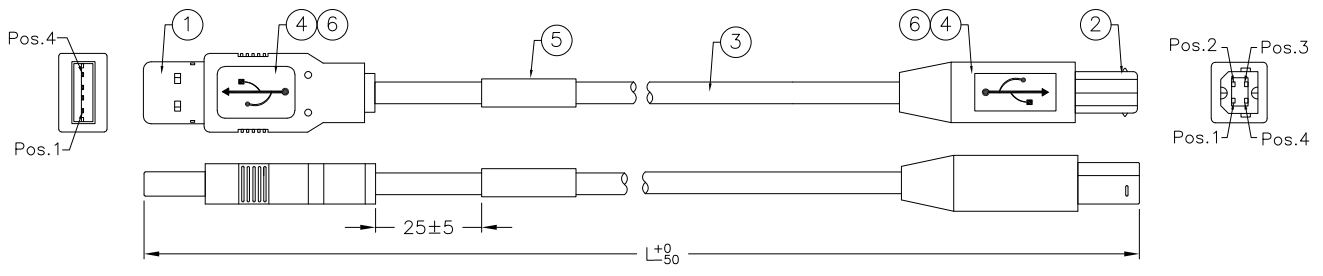

PIN ASSIGNMENT :

USB A	2	3	1	4	Shell
	White(D-)	Green(D+)	Red(Vbus)	Black(Gnd)	Drain Braid
Pair	1				
USB B	2	3	1	4	Shell



PART NO.	1487596-1	1487596-2	1487596-3	1487596-4
LENGTH(L)	2000	1500	1829	1000

AR	AR	AR	AR	MR	DESCRIPTION	ITEM
1	1	1	1	PC	COPPER FOIL, W: 5MM	6
AR	AR	AR	AR	KG	LABEL, 25x35mm, White 25x13mm	5
AR	AR	AR	AR	MR	Overmold PVC, 40P, Color: Black(BK01)	4
AR	AR	AR	AR	MR	USB 2.0 Cable 28AWG*1P+24AWG*2C+Al/Mylar +Drain+Braid, Color: Black(BK01).	3
1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
1	1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-4	-3	-2	-1	U/M	DESCRIPTION	ITEM

- NOTES:
- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
 - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
 - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
 - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 2700MM PER USB SPECIFICATIONS.
 - MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN BOVEY LIU 25/FEB/02	CHK -	APVD F.D. McCORKELE 15/MAR/02	NAME
0 PLC ± -	1 PLC ± -	TE Connectivity			CABLE ASSEMBLY, USB A TYPE TO USB B TYPE
2 PLC ± -	3 PLC ± -	PRODUCT SPEC	-		
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	-		RESTRICTED TO
MATERIAL	FINISH	WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-1487596
CUSTOMER DRAWING			SCALE N.T.S.	SHEET 1 of 1	REV D1