


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		REVISE PER ECO-05-006320	01AUG05	TW	JH

Tooling Drawing NO.  
 USB A: TR00662  
 USB B: TR00664

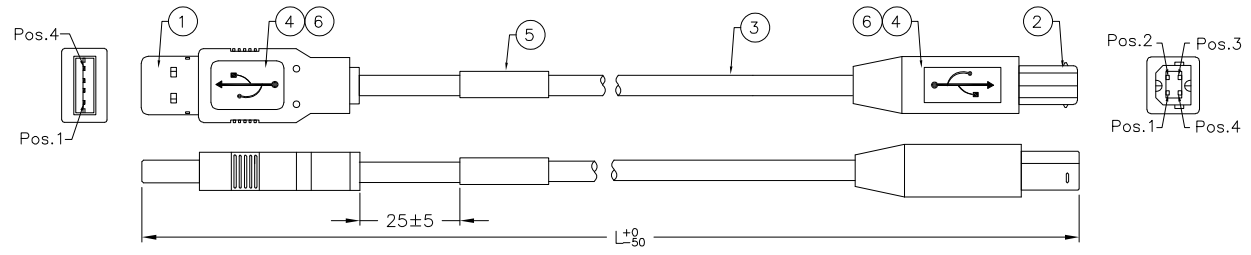

PIN ASSIGNMENT :

USB A	2	3	1	4	Shell
	Pair 1		Red(Vaus)	Black(Gnd)	Drain Braid
	White(D-)	Green(D+)			
USB B	2	3	1	4	Shell



PART NO.	1487597-1	1487597-2	1487597-3
LENGTH(L)	3000	2500	3500

AR	AR	AR	MR	COPPER FOIL, W: 5MM	6
1	1	1	PC	LABEL, 25x35mm, White 25x13mm	5
AR	AR	AR	KG	Overmold PVC, 40P, Color: Black(BK01)	4
AR	AR	AR	MR	USB 2.0 Cable 25AWG*1P+22AWG*2C+Al/Mylar +Drain+Braid, Color: Black(BK01).	3
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-3	-2	-1	U/M	DESCRIPTION	ITEM

- NOTES:
1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 4300MM PER USB SPECIFICATIONS.
  5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	BOVEY LIU	25/FEB/02	Tyco Electronics Corporation Harrisburg, Pa 17105-3608						
DIMENSIONS: mm		CHK	-	-							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	F.D. McCORKE	15/MAR/02	NAME CABLE ASSEMBLY, USB A TYPE TO USB B TYPE						
0 PLC ± -		PRODUCT SPEC	-	-							
1 PLC ± -		APPLICATION SPEC	-	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
2 PLC ± -		WEIGHT	-	-	A3	00779	C=1487597	-			
3 PLC ± -		CUSTOMER DRAWING		SCALE	N.T.S	SHEET	1	OF	1	REV	D
4 PLC ± -											
ANGLES ± -											
MATERIAL											
FINISH											