


SAC-3P- 3,0-PUR/M 8FS

Order No.: 1669725



Sensor/actuator cable, 3-pos., PUR halogen-free black, straight M8 socket, on free conductor end, cable length: 3 m

| Commercial data | |
|--------------------------|-------------------|
| EAN | 4017918134624 |
| Pack | 1 Pcs. |
| Customs tariff | 85444290 |
| Weight/Piece | 0.0755 KG |
| Catalog page information | Page 62 (PC-2007) |

| Product notes |
|-------------------------------------------------------------------------------------|
| WEEE/RoHS-compliant since: 12/01/2005 |
|  |

Technical data

| General data | |
|-----------------------|----------------------------|
| Nominal current I_N | 3 A |
| Nominal voltage U_N | 60 V |
| Number of positions | 3 |
| Volume resistance | $\leq 5 \text{ m}\Omega$ |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |

| | |
|---------------------------------|------------------------------------------------|
| Length of cable | 3 m |
| Ambient temperature (operation) | -25 °C ... 90 °C (plug/socket) |
| | -40 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (cable, flexible installation) |

General characteristics

| | |
|------------------------------------|---------------------------------------------|
| Coding | A - standard |
| Inflammability class acc. to UL 94 | HB |
| Surge voltage category | II |
| Pollution degree | 3 |
| Degree of protection | IP65/IP68/IP69K |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, (nickel-plated) |
| Sealing material | NBR |
| Status display | No |

Conductor data

| | |
|------------------------------------|-----------------------------|
| Cable type | PUR halogen-free black |
| Cable abbreviation | Li9Y11Y-HF |
| Conductor cross section | 0.25 mm ² |
| AWG signal line | 24 |
| Conductor structure, signal line | 32 x 0.10 mm |
| Core diameter including insulation | 1.15 mm ±0.05 mm |
| Thickness, insulation | ≥ 0.38 mm (Core insulation) |
| External cable diameter | 4.40 mm |
| Wire colors | Brown, blue, black |
| External sheath, color | Black-gray RAL 7021 |
| Insulation resistance | ≥ 100 GΩ*km |
| Conductor resistance | ≤ 77.6 Ω/m |
| Nominal voltage, conductor | 300 V |
| Test voltage, conductor | 4000 V |
| Overall twist | 3 wires, twisted |
| Outer sheath, material | PUR |

| | |
|-----------------------------------------------|--------------------------------|
| Material conductor insulation | PP |
| Conductor material | Bare Cu litz wires |
| Cable weight | 23 kg/km |
| Smallest bending radius, movable installation | 44 mm |
| Max. bending cycles | 4000000 |
| Bending radius | 44 mm |
| Traversing path | 10 m |
| Traversing rate | 3 m/s |
| Acceleration | 10 m/s ² |
| Special properties | Flexible cable conduit capable |
| Flame resistance | As per UL-Style 20549 |
| Freedom from halogen | As per DIN VDE 0472 part 815 |

Certificates / Approvals




Certification

CUL Listed, GOST, UL Listed


Drawings

Dimensioned drawing

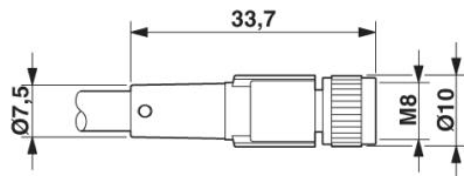

Socket M8 x 1, straight

Circuit diagram

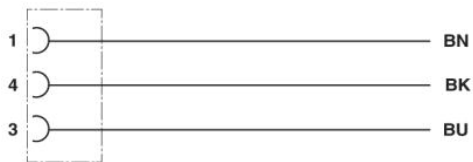

Contact assignment of M8 socket

Schematic diagram

Pin assignment M8 socket, 3-pos., view female side

