



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.
 Tooling Drawing NO.
 USB A: TR00662

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00				
	C	REVISE PER ECO-05-006320	01AUG05	TW	JH

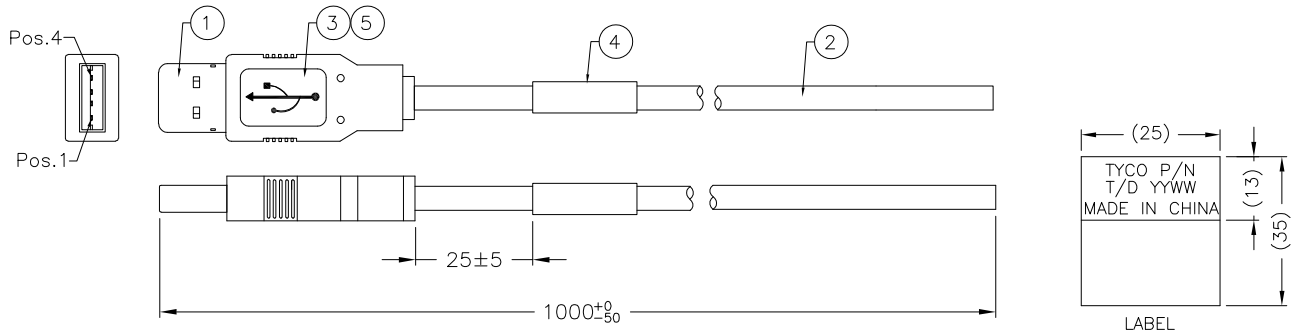

- NOTES:
1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
 2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
 3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
 4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1700MM PER USB SPECIFICATIONS.
 5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

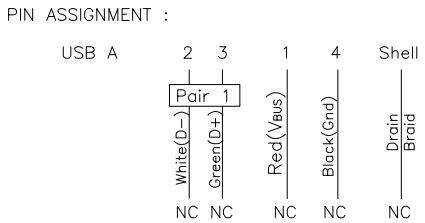

AR	MR	COPPER FOIL, W: 5MM	5
1	PC	LABEL, 25x35mm, White 25x13mm	4
AR	KG	Overmold PVC, 40P, Color: Black(BK01)	3
AR	MR	USB 2.0 Cable 28AWG*1P+26AWG*2C+Al/Mylar +Drain+Braid, Color: Black(BK01).	2
1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-1	U/M	DESCRIPTION	ITEM

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN BOVEY LIU 25/FEB/02		Tyco Electronics Corporation	
mm		0 PLC	± -	CHK	-	Harrisburg, Pa 17105-3608	
		1 PLC	± -	APVD	15/MAR/02	NAME	
		2 PLC	± -	F.D. McCORKELE		CABLE ASSEMBLY, USB A TYPE TO NC	
		3 PLC	± -	PRODUCT SPEC		-	
		4 PLC	± -	APPLICATION SPEC		-	
		ANGLES	± -	WEIGHT		-	
MATERIAL		FINISH		SIZE		CAGE CODE	DRAWING NO
-				A3		00779	1487600
CUSTOMER DRAWING				SCALE		RESTRICTED TO	
				N.T.S		-	
				SHEET		1 OF 1	
				REV		C	