
SPECIFICATION CONTROL DRAWING

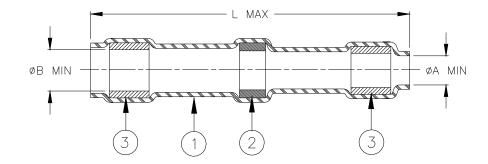

Product Revision		Proc	luct Dimensi	ons	Wire Dimensions		CMA Range	
Product	Product		øA	øB	øD			
Name		max	min	min	max	min	Range	
D-1744-01	В	29.70	1.90	2.40	1.90	0.50	350 to 2000	
		(1.170)	(0.075)	(0.095)	(0.075)	(0.020)		
D-1744-02	С	30.15	2.80	3.15	2.80	0.80	2000 to 4000	
		(1.187)	(0.110)	(0.125)	(0.110)	(0.030)		
D-1744-03	В	29.60	4.60	5.10	4.57	1.30	4000 to 10000	
		(1.165)	(0.180)	(0.200)	(0.180)	(0.050)		
D-1744-04	В	30.00	7.11	7.62	7.11	2.00	10000 to 13000	
		(1.180)	(0.280)	(0.300)	(0.280)	(0.080)		

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX AND THERMAL INDICATOR:

SOLDER: TYPE Sn63 per ANSI/J-STD-006.

FLUX: TYPE ROL1 per ANSI/J-STD-004.


THERMAL INDICATOR: Violet

 ${\it 3. \,\, MELTABLE \,\, RINGS: \, Thermally \,\, stabilized \,\, thermoplastic. \,\, Color: \,\, gray.}$

APPLICATION

- 1. These parts are designed to provide an environment resistant in-line splice in wires having tin or silver-plated conductors and insulation rated for at least 125°C.
- 2. Temperature range: -55°C to +150°C.
- 3. Install using TE Connectivity/ Raychem-approved convection or infrared tools in accordance with TE Connectivity/ Raychem installation procedure RPIP-850-00.
- 4. Assemblies will meet requirements of TE Connectivity / Raychem specification RT-1404 and National Aerospace Standard NAS-1744.

For best results, prepare the wire(s) as shown:



			ctivity itution Drive, k, CA. 94025, U.S.A.			SOLDERSLEEVE WIRE SPLICE				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets] TOLERANCES: ANGLES: N/A TE Connectivity reserves the right to amend					Ι	D-1744-01/-02/-03/-04				
0.00 N/A 0.0 N/A 0 N/A	ROUG MICR	GHNESS IN	this drawing at any time. Users should evaluate the suitability of the product for their application.		te P	PROD. REV.: SEE TABLE	DOC. ISSUE:	DATE: 15-Apr-11		
PREPARED BY: mforonda			BER: 40063	REPLACES: D030265	(CAGE CODE : 06090	SCALE:	SIZE:	SHEET: 1 of 1	

Print Date: 9-May-11 © 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved. If this document is printed it becomes uncontrolled. Check for the latest revision.