

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
 FREEPORT, ILLINOIS

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - RX

BZ - RX
 ISSUE 10

REPLACES

RELEASE NO.

M BZ - RX

DRAWING NUMBER

ISSUE

13

CHECK

CHECK

B, JUNE 62

D, W

CHECK


CHECK

19 JAN 62

G C H

DRAWN

19 JAN 62

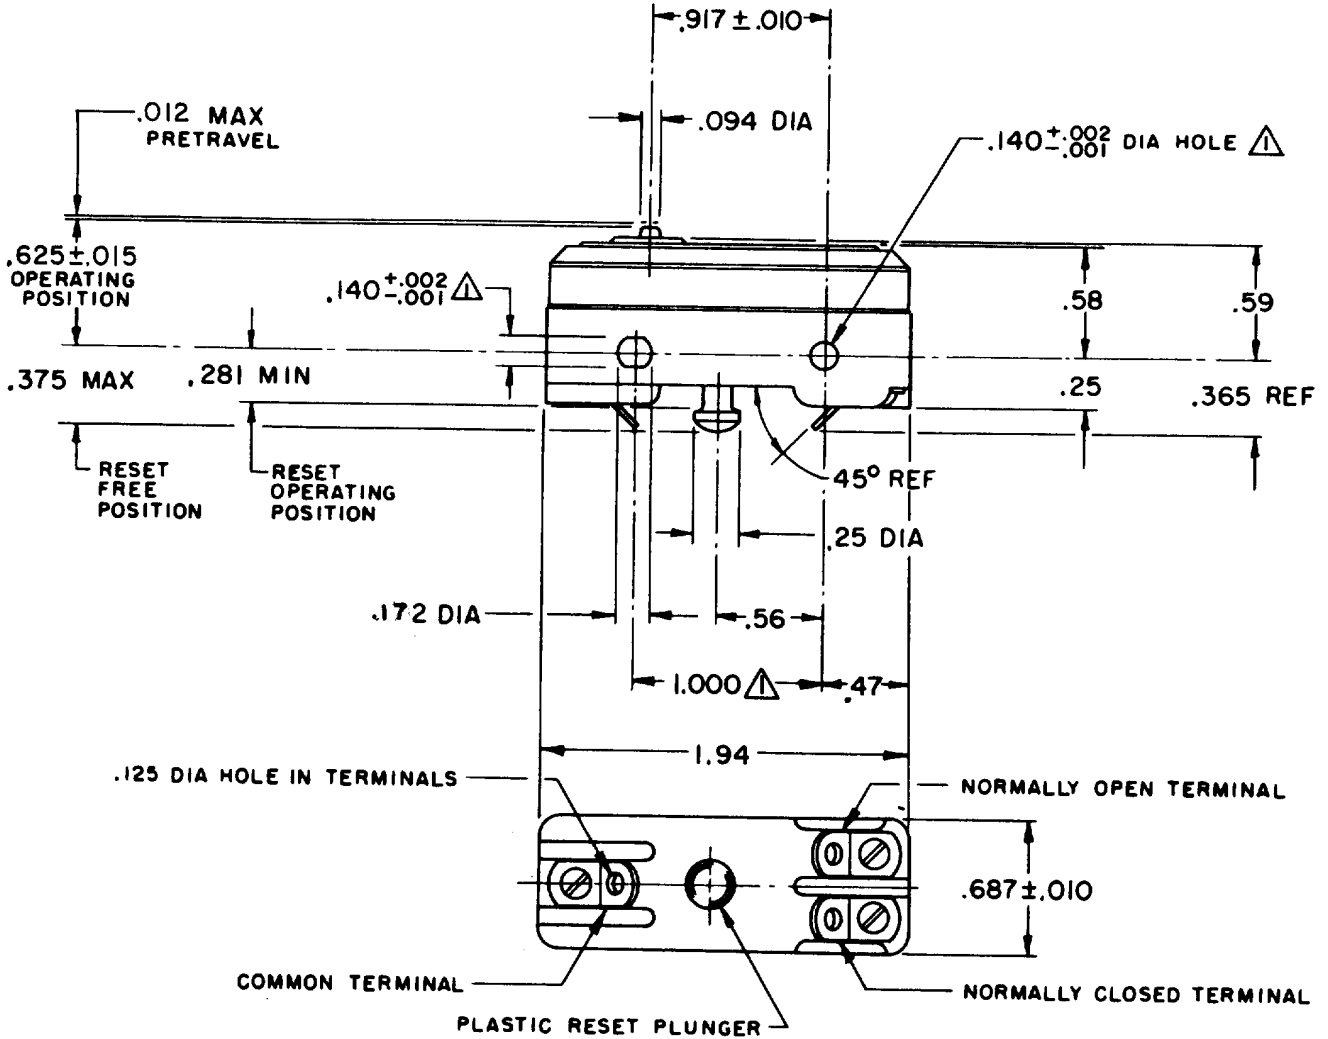

NOTE -
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 7-9 OZ
 OVERTRAVEL ----- .005 MIN

RESET CHARACTERISTICS

OPERATING FORCE ----- 2-10 OZ
 OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 SINGLE POLE DOUBLE THROW
 MAINTAINED CONTACT

BREAK DISTANCE

UNDERWRITERS' LAB. INC. LISTED RATING
 15 A - 125, 250, OR 480 VAC
 1/4 HP - 125 VAC; 1/2 HP - 250 VAC
 -L 67-
 1/2 A - 125 VDC; 1/4 A - 250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
 ONE PLACE (.0) ± .030
 TWO PLACE (.00) ± .015
 THREE PLACE (.000) ± .005
 ANGLES ±

WEIGHT .055 LB