MICRO SWITCH
FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH—BASIC

CATALOG LISTING
BZ-2RW82276T
APT8640

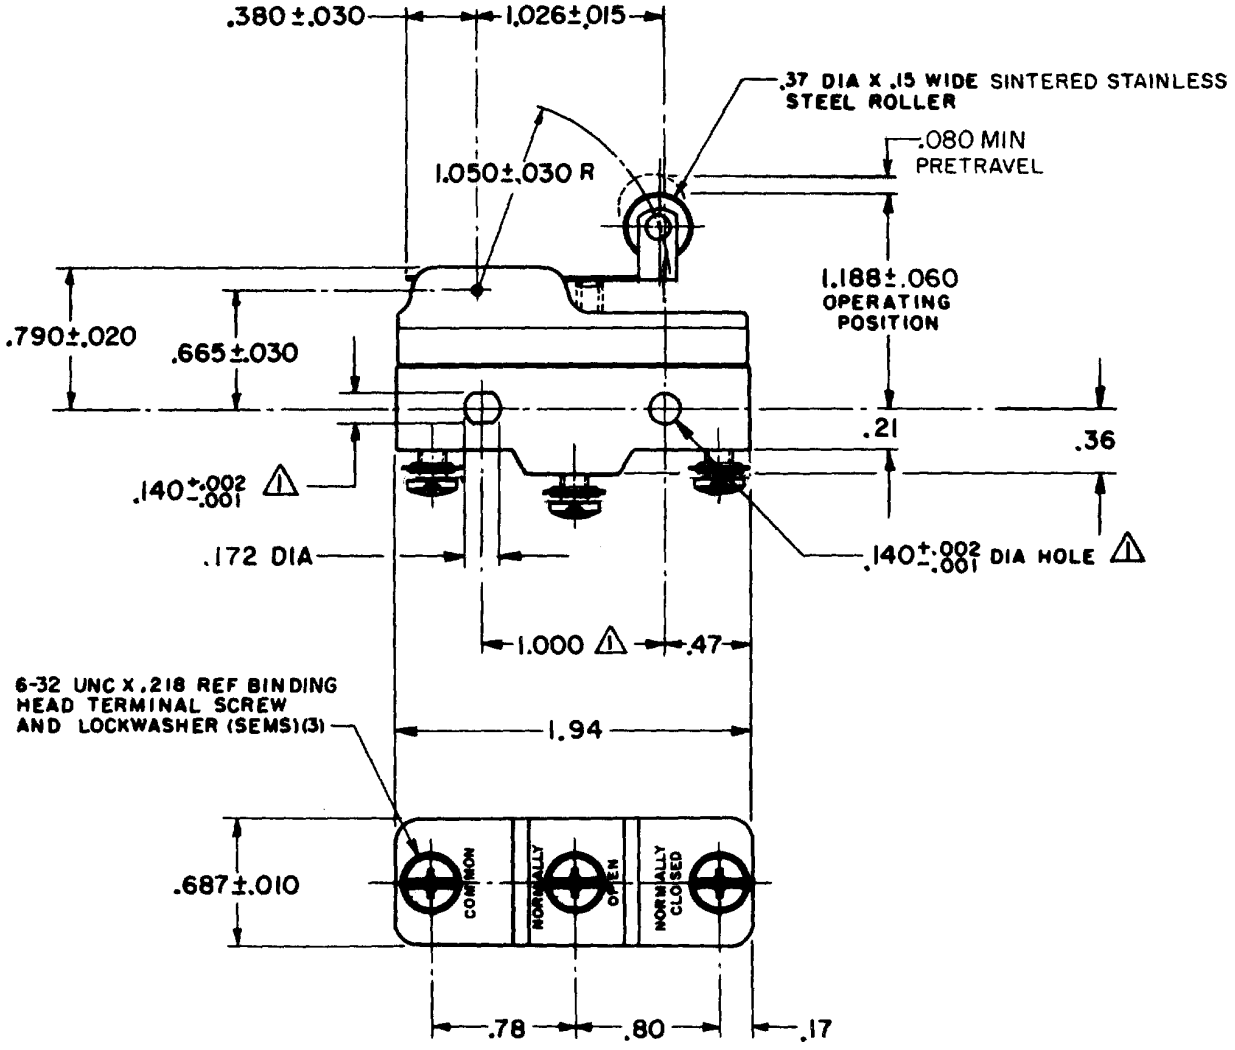

NOTE
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE——————— 6 OZ MAX
RELEASE FORCE——————————1 1/2 OZ MIN
DIFFERENTIAL TRAVEL————.020 MAX
OVERTRAVEL——————————.049 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L96- 15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC, 1/4 HP - 250 VAC

-L288-
-L315-
-L306-

16A 250V ~ T85 5E4

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .076 LB

ISSUE	DRAWING NUMBER	RELEASE NO.	REPLACES
10	M BZ-2RW82276T	PR-517	PAGE 1 OF 1

REVISIONS			
A	PR-517 GFS 6 FEB 69	08DEC05	CHECK
B	C028462 R E R 21 JAN 71		
C	C032630 R E R 26 NOV 73	RJ	
D	CO-[illegible]-D JWB 18 JUL 91		CHECK
E	CO-70184-G GJW 10 MAR 92	08OCT68	
F	CO-75204B DAW 11 FEB 94		
G	CO-77589 MAM 19 MAR 94	15OCT68	
H	C093346 D L T 17 SEP 98		
J	0017579 KRB 08DEC05		CHECK

FORMTEK FO-50378-1A	DRAWN	15 OCT 68	CHECK
	G F S		

Downloaded from Elcodis.com electronic components distributor