


CW-B3064

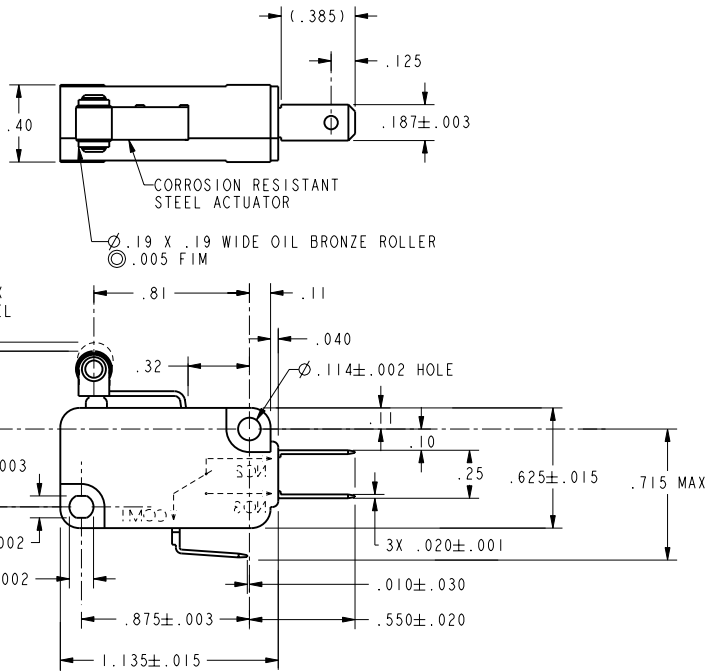

| | | | | | | | | | | | |
|-----------------------------------|--|---|--|--|--|--|-----|---|---|----------------------|--------|
| CHARACTERISTICS | | ELECTRICAL DATA | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: <input checked="" type="checkbox"/> CUSTOMARY <input type="checkbox"/> METRIC | | DRAWN | GJW | 06SEP01 | Honeywell Sensing and Control | | |
| OPERATING FORCE----- 88 GRAMS MAX | | CONTACT ARRANGEMENT S P D T | | NO PLACE X ±.040 ±1 | | CHECK | SAV | 06SEP01 | | | |
| RELEASE FORCE ----- 7 GRAMS MIN | | L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L" RLC | | ONE PLACE .X ±.030 ±0,4 | | THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL SENSING AND CONTROL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. | | | | | |
| DIFFERENTIAL TRAVEL----- .012 MAX | | | | TWO PLACE .XX ±.015 ±0,15 | | | | | | | |
| OVERTRAVEL ----- .041 MIN | | | | THIRD ANGLE PROJECTION | | THREE PLACE .XXX ±.005 ± | | SIZE | DWG TYPE | DRAWING NAME | REV |
| RELEASE TRAVEL----- .007 MIN | | | | THIRD ANGLE PROJECTION | | RAW MATERIAL-COMMERCIAL STANDARD | | DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED | | SWITCH, BASIC | |
| | | | | | | PTC 2D | | ASME Y14.5M-1994 | SCALE | NONE | WEIGHT |