



V7-1S17D8



Actual product appearance may vary.

V7 Series Miniature Basic Switch, Single Pole Double Throw Circuitry, 100 mA at 125 Vac, Pin Plunger Actuator, 1,47 N [5.3 oz] Maximum Operating Force, Gold Contacts, Quick Connect Termination, CSA, UL

V7 Series Features

- World-wide package size acceptance
- Current rating ranges from 0.1 A to 25 A
- Wiping contact action
- Temperature range to 177 °C [350 °F]
- Long mechanical life
- Elongated mounting holes for easier, more accurate mounting
- UL/CSA recognized, ENEC (European) approval available
- Choice of actuation, termination and operating characteristics

Potential Applications

- Appliances
- Vending machines
- Timing devices
- Office equipment
- Computer/business equipment
- Test instruments
- Medical/dental equipment
- Communications equipment
- HVAC equipment
- Manually operated devices
- Valves
- Gaming equipment
- Pressure switches



Description

MICRO SWITCH™ V5 and V7 Series basic switches are used for simple or precision on/off, end of limit, presence/absence, pressure, temperature and manual operator interface application needs.

Product Specifications	
Switch Type	MICRO SWITCH™ Miniature 15,9 mm H x 10,2 mm W x 28,8 mm L [0.63 in H x 0.4 in W x 1.14 in L]
Sealed	No
Ampere Rating	0.1 A
Circuitry	Single Pole Double Throw (SPDT)
Actuator	Pin Plunger
Termination	Quick Connect
Operating Temperature Range	-40 °C to 82 °C [-40 °F to 180 °F]
Voltage	125 Vac
Approvals	CSA,UL,ENEC
Contact Type	Gold
Operating Force (O.F.)	1,47 N [5.3 oz] max.

Release Force (R.F.)	0,24 N [0.88 oz] min.
Pretravel (P.T.)	1,19 mm [0.748 in] [0.047 in] max.
Overtravel (O.T.)	1,27 mm [0.050 in] min.
Differential Travel (D.T.)	0,05 mm - 0,25 mm [0.002 in - 0.010 in]
Housing Material	PCT PolyesterThermoplastic
High Temperature	85 °C [185 °F]
UL File #	E12252
CSA File #	LR41370
Agency Approvals and Standards	1054
Mounting Centers	22,2 mm [0.88 in]
Maximum Tightening Torque	0,56 N m [5.0 in lb]
Weight	8 g [0.3 oz]
Package Height	16 mm [0.63 in]
Package Width	10,2 mm [0.40 in]
Package Length	27,7 mm [1.09 in]
Availability	Global
UNSPSC Code	30211905
UNSPSC Commodity	30211905 Snap switches
Series Name	V7


CATALOG LISTING V7-1S17D8
 PAGE 1 OF 1
 REPLACES RELEASE NO. PR-17794
 ISSUE 7
 REVISIONS:
 A CO-68464
 26 SEP 90
 B CO-74431
 26 FEB 93
 C CO-177116
 31 MAR 94
 D CO82776
 5 APR 96
 E CO92478
 21 APR 98
 F CO-93311
 21 OCT 98
 FORMTEK DRAWN WJM 20 FEB 90
 CHECKED DAW 23 FEB 90

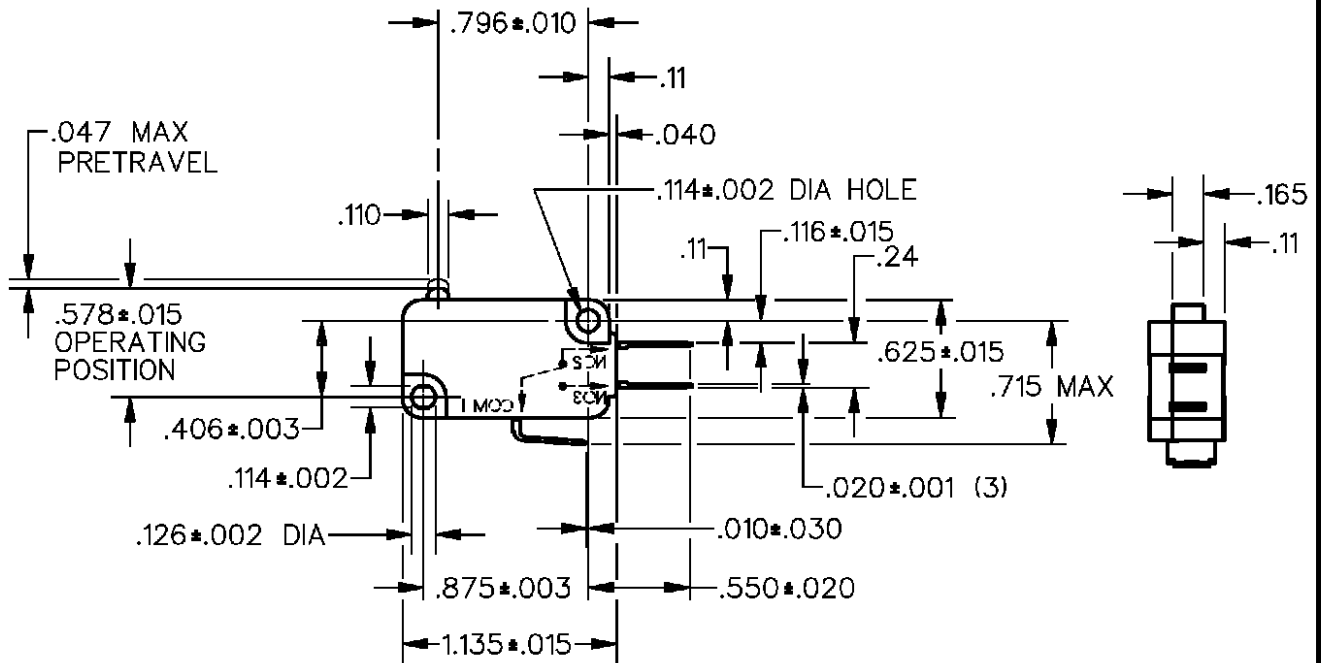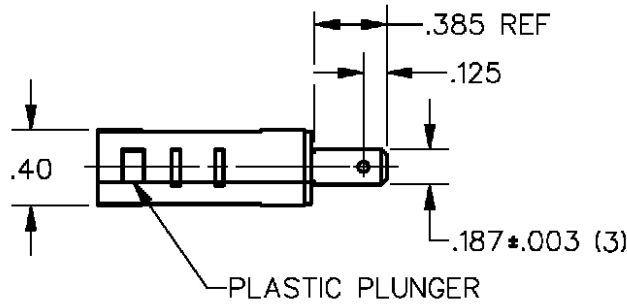


NOTES
 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - 150 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE - - - - 25 GRAMS MIN	0.1A 125 VAC	ONE PLACE (.0) ±.030	
DIFFERENTIAL TRAVEL - - - .002-.010		TWO PLACE (.00) ±.015	
OVERTRAVEL - - - - - .050 MIN	L142 	THREE PLACE (.000) ±.005	
RELEASE TRAVEL - - - - - .010 MIN		ANGLES ±	
FREE POSITION - - - - - .625 MAX		WEIGHT	