

4AC55



AC Series Door Switch, Single Pole Double Throw Double Break Circuitry, 5 A at 250 Vac, Steel Rod Actuator, Screw Termination, Military Part Number MS16106-5

Actual product appearance may vary.

Features

- Automatically cuts power when service door or drawer is opened
- Choice of momentary, maintained or pull-to-charge actuation
- Versatile mounting bracket for side or end mounting
- Current rating ranges from 5 A to 25 A
- Available with one or two SPDT switches
- UL recognized versions available
- Choice of termination

Potential Applications

- Appliances
- Vending machines
- Office equipment
- Computer/business equipment
- Test instruments
- Medical/dental equipment
- Communications equipment
- HVAC equipment

Description

MICRO SWITCH™ AC Series Door Switches are used for simple or precision on/off application needs. They enable circuit testing with POWER ON by manually pulling a rod actuator to the maintained-ON position. Closing the door resets the switch.


Product Specifications	
Switch Type	Door 38,1 mm H x 12,7 mm W x 38,1 mm L [1.5 in H x 0.5 in W x 1.5 in L]
Sealed	No
Ampere Rating	15 A
Circuitry	Single Pole Double Throw, Double Break (2 CKT DB)
Actuator	Rod
Termination	Screw
Operating Temperature Range	-55 °C to 85 °C [-67 °F to 185 °F]

Voltage	250 Vac
Contact Type	Silver
Operating Position (O.P.)	4,75 mm [0.187 in] min.
Free Position (F.P.)	9,53 mm [0.375 in] max.
Housing Material	Stainless Steel bracket
Military Part Number	MS16106-5
Package Height	66.55 mm [2.62 in]
Package Width	13.21 mm [.52 in]
Package Length	40.39 mm [1.59 in]
Availability	Global
UNSPSC Code	30211905
UNSPSC Commodity	30211905 Snap switches
Series Name	AC

MICRO SWITCH
 a Honeywell Division
FED. MFG. CODE 91929

ASSEMBLY-SWITCH

CATALOG LISTING
4AC55
KC-D0563
MILITARY STDS PART NO.
MS 16106-5

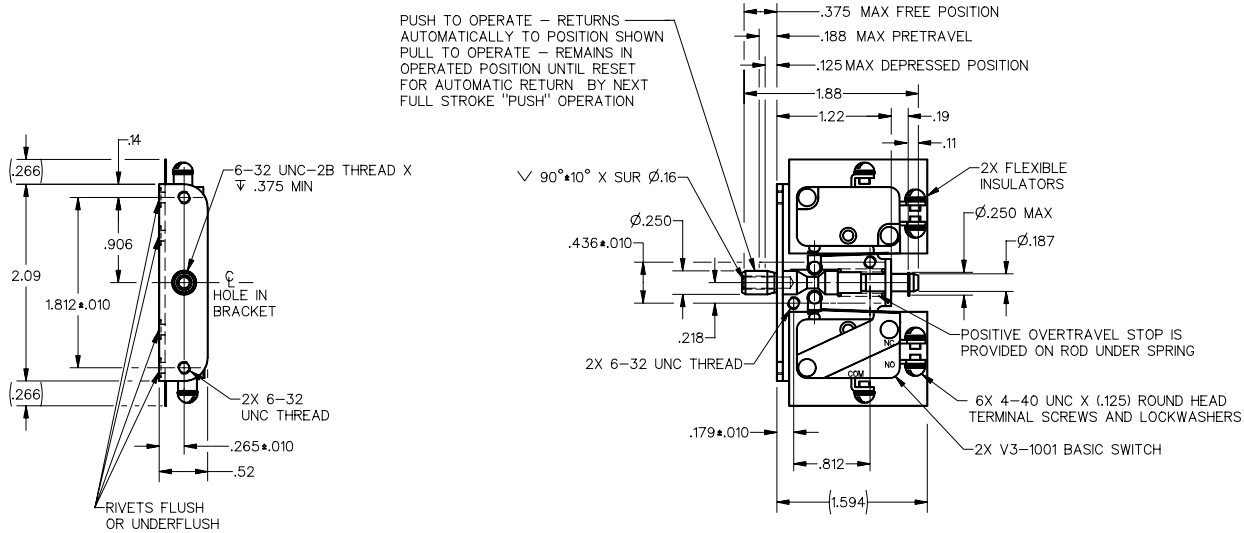

- NOTES
- 1 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
 - 2 - NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET
 - 3 - BASIC SWITCH PLASTIC PARTS ARE MADE OF DIALLYL PHTHALATE
 - 4 - WITH ROD IN EITHER ACTUATED POSITION, BASIC SWITCH PLUNGER OPERATED MUST HAVE .010 MIN OVERTRAVEL AND THE UNOPERATED PLUNGER MUST HAVE .005 MIN RELEASE TRAVEL, WITH ROD IN FREE POSITION, BASIC SWITCH PLUNGER MUST HAVE .005 MIN RELEASE TRAVEL

<small>THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH</small>		<small>THIRD ANGLE PROJECTION</small> 	
		<small>SCALE FULL</small> <small>DO NOT SCALE PRINT</small>	
CHARACTERISTICS		ELECTRICAL DATA	
TOTAL TRAVEL .250 APPROX PUSH DIRECTION .187 APPROX PULL DIRECTION		CONTACT ARRANGEMENT 2X S P D T	
		<small>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</small> ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT .125 LB	

ANSI Y14.5M-1982 APPLIES