




THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
P	LTR	DESCRIPTION	DATE	BY
B1		REVISED PER ECO-11-005027	11MAR11	RK HMR



SIDE VIEW
 (SEE NOTE 3)

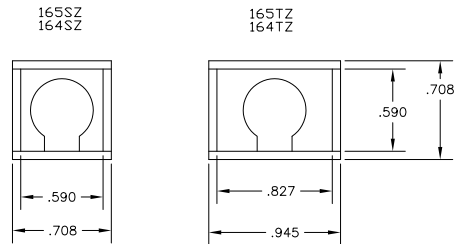

SPECIFICATIONS:
 LAMP DISSIPATION: 1.2W MAX.
 INSULATION RESISTANCE: 100 MEGOHMS MIN.
 DIELECTRIC STRENGTH: 2000 VAC.
 OPERATING TEMPERATURE: -20°C TO +50°C
 (-4°F TO +122°F).

- NOTES:**
- LAMP IS T 3/4 MIDGET FLANGE BASE TYPE (LAMP NOT SUPPLIED).
 - 164 IS NON-DILTIGHT SERIES, 165 IS DILTIGHT SERIES.
 - VIEWS INCLUDE PLASTIC SHROUDS FOR AVAILABLE LENS SETS, (NOT SUPPLIED).

- THE PLATINGS CONTAINED IN THIS PART SHALL CONTAIN NO LEAD.
- PRELIMINARY PART, NOT RELEASED FOR PRODUCTION.

1571542-4	165TZ		
1571542-3	164TZ		
1571542-2	164SZ		
1571542-1	164EZ		
5-1437569-9	165TZ		
5-1437569-3	165SZ		
4-1437569-6	165EZ		
4-1437569-1	164TZ		
3-1437569-2	164SZ		
1437569-8	164EZ		
PART No.	MODEL NUMBER	COMMENTS	

REF AUGAT 81091

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED:		TE Connectivity	
INCHES	0 PLC ± .005	1 PLC ± .005	2 PLC ± .010	3 PLC ± .010	4 PLC ± .010	PILOT LIGHT 164/165 Z	
	ANGLES ± .5°					SIZE	CAGE CODE
MATERIAL	FINISH					A2	00779
						DRAWING NO.	2-1437569-4
						RESTRICTED TO	
						CUSTOMER DRAWING	SCALE
						NTS	SHEET
						1 of 1	REV B1