



### AML34EBA4AC01



**AML34 Series Rocker Switch, DPST, 2 position, Silver Contacts, 0.187 in x 0.02 in (Solder or Quick-Connect), Non-Lighted, Rectangle, Snap-in Panel**

*Actual product appearance may vary.*

#### Features

- Same circuitry and electrical rating as power duty paddle switches
- 1 or 2 poles
- Maintained on, off position operation
- Neon lamp circuitry can be isolated or Integral circuits
- Up to 15 A, 125 or 250 Vac
- UL recognized
- CSA certified

#### Potential Applications

- Industrial machinery and equipment
- Commercial aviation
- Construction equipment
- Test instruments
- Agricultural machinery
- Process control
- Medical instrumentation

#### Description


Electronic control rectangular power duty rocker switches with black bezels. Switches have maintained on and off operating action. Neon lamp available with integral lamps on two-pole switches; isolated lamp circuitry only on one-pole switches. Solder or quick connect terminals are 0.187 in by 0.020 in dimension. Rocker operators ordered separately.

Product Specifications	
Circuitry/Operating action	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p><b>Keyway Position</b></p> </div> <div style="text-align: center;"> <p><b>Opposite Keyway Position</b></p> </div> </div>
Product Type	MICRO SWITCH™ Rocker
Housing Type	Non-Lighted, Rectangle
Contact Type	Silver Contacts
Circuitry	DPST
Action	2 position
Mounting	Snap-in Panel
Termination	0.187 in x 0.02 in (Solder or Quick-Connect)

Availability	Global
UNSPSC Code	302368
UNSPSC Commodity	302119 Switches and controls and relays
Series Name	AML34


# SOLID STATE SWITCH AML10 SERIES AND ELECTRONIC CONTROL AML 20 SERIES

## ACTUATORS FOR AML 10 SERIES & AML 20 SERIES




LED

NON ILLUMINATED AND INCANDESCENT




LED

NON ILLUMINATED AND INCANDESCENT

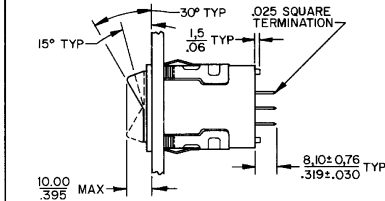


ROCKER

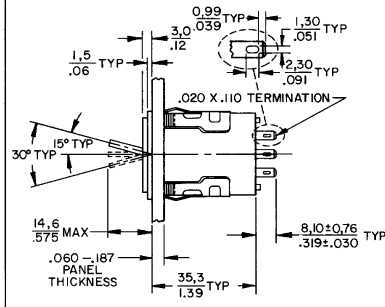

PADDLE


## TERMINATION AML 10 SERIES

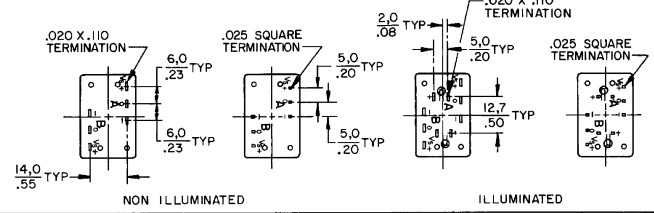

NON ILLUMINATED

ILLUMINATED

## TERMINATION AML 20 SERIES

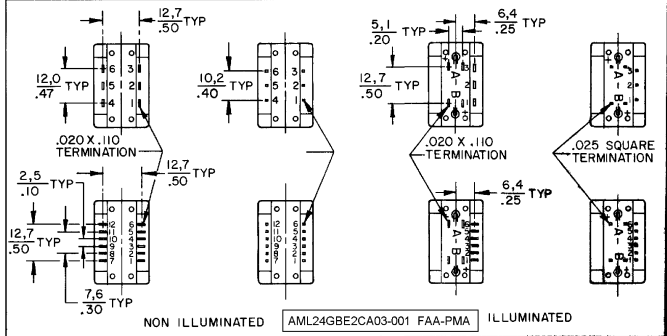


NON ILLUMINATED

ILLUMINATED


## POWER SWITCH AML 30 SERIES

### ACTUATORS FOR AML 30 SERIES




NEON

NON ILLUMINATED AND INCANDESCENT




NEON

NON ILLUMINATED AND INCANDESCENT




ROCKER



PADDLE

MASTER REDUCED


## TERMINATION AML 30 SERIES

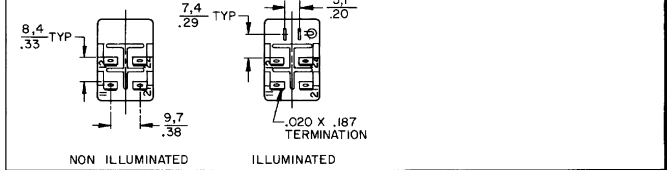

NON ILLUMINATED

ILLUMINATED

## PANEL CUTOUTS FOR AML 10, 20 & 30 SERIES

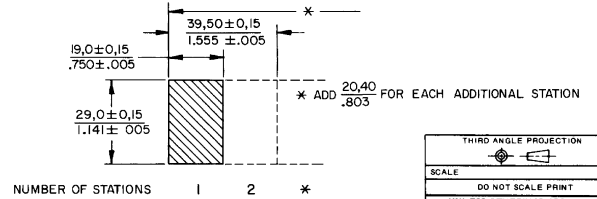

NUMBER OF STATIONS

1

2

\*

THIRD ANGLE PROJECTION	
SCALE	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ± .030
TWO PLACE	(.00) ± .015
THREE PLACE	(.000) ± .005
ANGLES	±
WEIGHT	

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
a Honeywell Division

AML PADDLE AND ROCKER

AML10 20 30 SERIES CHART 1

FED. MFG. CODE 91929

CATALOGUE LISTING  
 AML 10 20 30 SERIES CHART 1  
 PAGE 1 OF 4  
 RELEASE NO. CO-784138  
 DATE 12-30-54  
 REV 15 (2ND)  
 15-2842  
 1-7-58  
 B 0000447  
 2-5-53  
 RASTER  
 SAID TO JUN 24 1954  
 13