
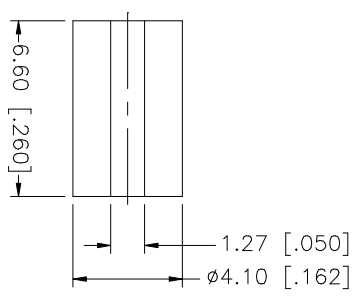
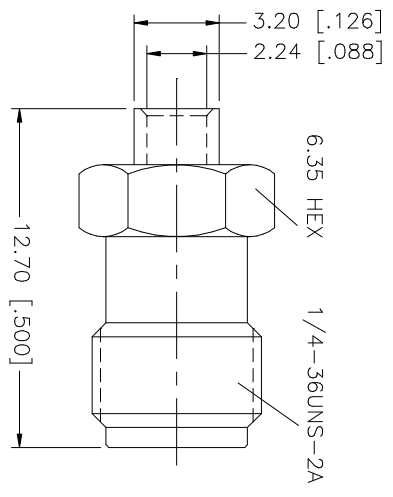





REV.	DATE	DESCRIPTION
A	01/25/04	UPDATE DRAWING FORMAT
B	08/07/05	MODIFY CONTACT PIN



NOTE:
1. CONTACT PIN TO SOLDER

8																			
7																			
6																			
5	SOLDER BARREL	BRASS	GOLD	1															
4	INSULATOR	TEFLON	NATURAL	1															
3	CONTACT PIN	BER. COPPER	GOLD	1															
2	INSULATOR	TEFLON	NATURAL	1															
1	BODY	BRASS	GOLD	1															
DESCRIPTION		MATERIAL	FINISH	QTY															
					<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"</p> <p>DO NOT SCALE DRAWING</p>														
					APPROVALS		DATE												
					DRAWN G.R.S.		08/07/05												
					CHECKED														
					ISSUED														
					SHEET 1 OF 1														
					CAD FILE		C:/132/132257.DWG												
					DWG. NO.		132257.DWG		REV. B		SIZE A		SCALE NA						
					<p>Amphenol Connex</p> <p>PART DESCRIPTION SMA DIRECT SOLDER JACK (FOR .047" SIMI-RIGID CABLE)</p> <p>PART NO. 132257</p>														