



**We've Got The Power.™**


## PS-1230 12 Volt 3.4 AH

Rechargeable Sealed Lead Acid Battery





### Terminals (mm)

- F1 - Quick disconnect tabs, 0.187" x 0.032" - Mate with AMP. INC. FASTON "187" series



### Physical Dimensions: in (mm)

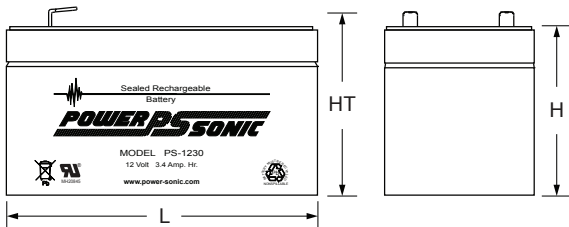

**L: 5.24 (133) W: 2.64 (67) H: 2.36 (60) HT: 2.60 (66)**

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

### Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

**Nominal Capacity**

|                                     |         |
|-------------------------------------|---------|
| 20-hr. (170mA to 10.50 volts) ..... | 3.40 AH |
| 10-hr. (330mA to 10.50 volts) ..... | 3.30 AH |
| 5-hr. (580mA to 10.20 volts) .....  | 2.90 AH |
| 1-hr. (2.2A to 9.00 volts) .....    | 2.20 AH |
| 15-min. (6.5A to 9.00 volts) .....  | 1.63 AH |

**Approximate Weight** ..... 2.90 lbs. (1.32 kg)

**Energy Density (20-hr. rate)** ..... 1.25 W-h/in<sup>3</sup> (76.26 W-h/l)

**Specific Energy (20-hr. rate)** ..... 14.07 W-h/lb (31.02 W-h/kg)

**Internal Resistance (approx.)** ..... 45 milliohms

**Max Discharge Current (7 Min.)** ..... 10.2 amperes

**Max Short-Duration Discharge Current (10 Sec.)**..... 34.0 amperes

**Shelf Life (% of nominal capacity at 68°F (20°C))**

|                |     |
|----------------|-----|
| 1 Month .....  | 97% |
| 3 Months.....  | 91% |
| 6 Months ..... | 83% |

**Operating Temperature Range**

|                |                               |
|----------------|-------------------------------|
| Charge.. ..... | -4°F (-20°C) to 122°F (50°C)  |
| Discharge..... | -40°F (-40°C) to 140°F (60°C) |


**Case** ..... ABS Plastic

**Power-Sonic Chargers** ..... PSC-12300A, 12500A


**Shelf Life & Storage**



**Discharge Characteristics**

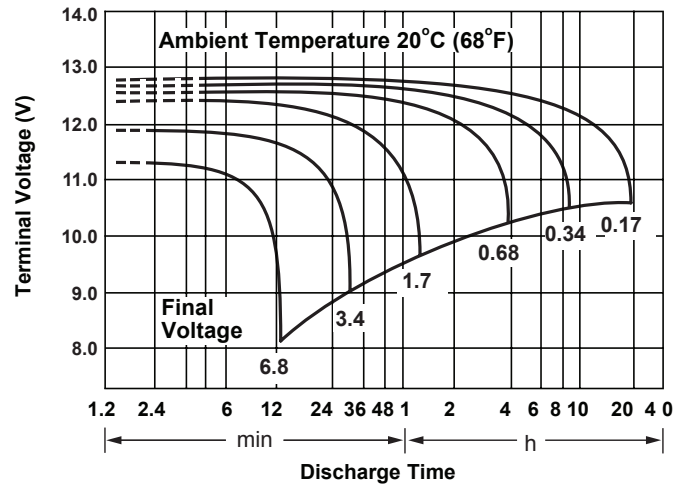


**Discharge Time vs. Discharge Current**

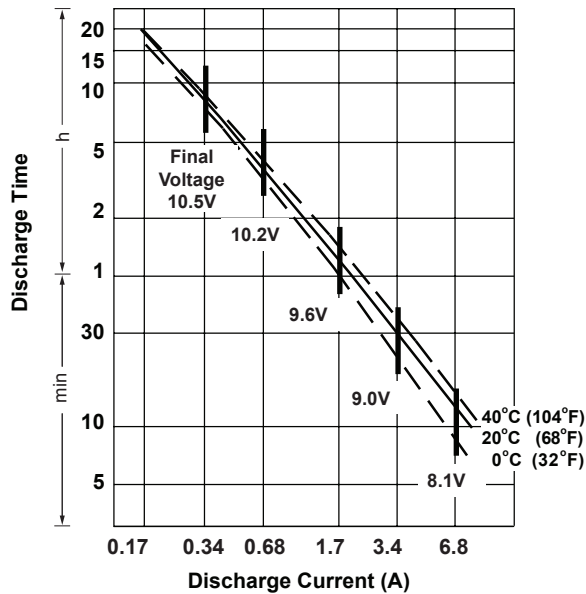

**Life Characteristics in Stand-By Use**



**Life Characteristics in Cyclic Use**

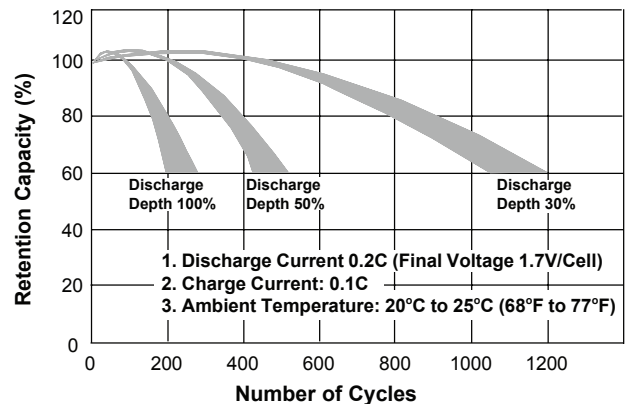

**Charging**

**Cycle Applications:** Limit initial current to 1.02A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 34mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**"Float" or "Stand-By" Service:** Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**

**DOMESTIC SALES**

Tel: +1-619-661-2020  
Fax: +1-619-661-3650  
national-sales@power-sonic.com

**CUSTOMER SERVICE**

Tel: +1-619-661-2030  
Fax: +1-619-661-3648  
customer-service@power-sonic.com

**TECHNICAL SUPPORT**

Tel: +1-619-661-2020  
Fax: +1-619-661-3648  
support@power-sonic.com

[www.power-sonic.com](http://www.power-sonic.com)

**INTERNATIONAL SALES**

Tel: +1-650-364-5001  
Fax: +1-650-366-3662  
international-sales@power-sonic.com