



**Key Features (289 Series):**

- Primary 240VAC, 50/60 Hz., Secondary 120VAC.
- Provides circuit isolation.
- Toroidal transformer for high isolation, low noise, light weight, cool operation and low profile.
- World wide applications, 50 or 60 Hz. operation, step down (240VAC to 120 VAC).
- Standard 3-wire, grounded plug (for use with [adaptors](#) for proper grounding).
- Input (primary) connected to a 5 foot long cord & standard 250V 2 pole, 3 wire - North American plug (NEMA 6-15P).
- Output (secondary) connected to two standard - 3 wire grounded receptacles (NEMA 5-15R).
- Features include ventilated black steel case, rocker lighted on-off switch & circuit breaker protected output.
- North American Mark of Safety - C UL & UL listed (File #E211544)
- **Remember** - These units do NOT convert line frequency.

**240VAC to 120VAC**


Part Number	Capacity VA	# of Outlets	Dimensions (Inches)		
			Length	Width	Height
<b>289CT</b>	<b>250</b>	2	8.25	6	4
<b>289DT</b>	<b>500</b>	2	9	6	4
<b>289ET</b>	<b>750</b>	2	10.25	7.5	5
<b>289FT</b>	<b>1000</b>	2	10.25	7.5	5
<b>289GT</b>	<b>1500</b>	2	12.5	9	5

Side View



click to enlarge

Internal View

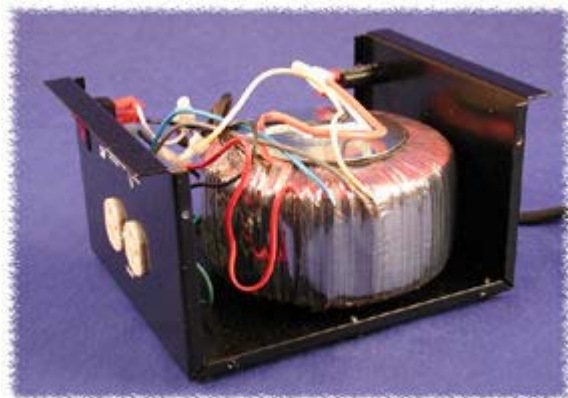

click to enlarge

**Schematic Data (289 Series):**

