


NUMBER
305183

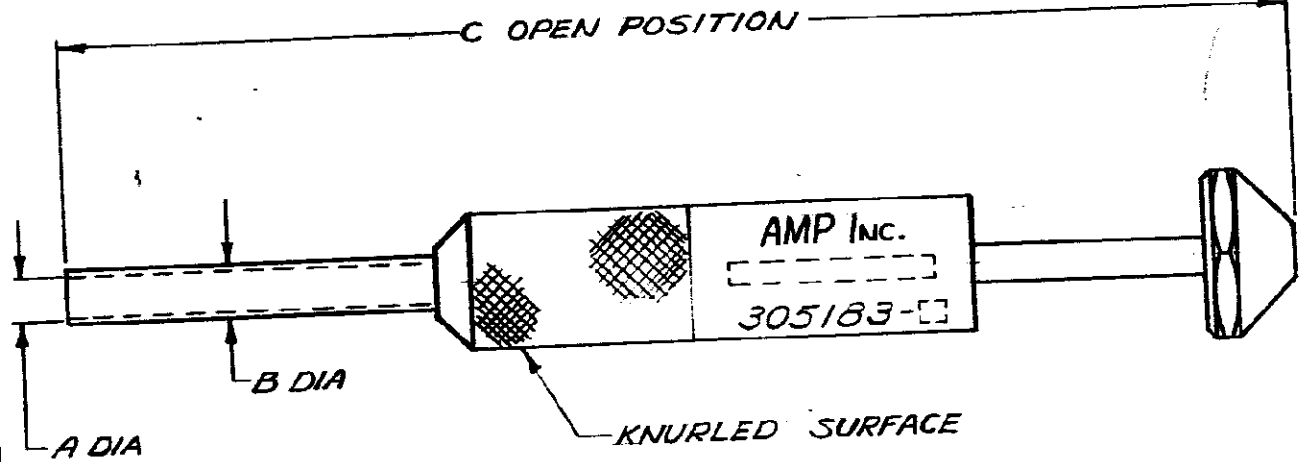

1-305183-3	A.P.L. POWER CONN.	.227	.243	4 1/16
1-305183-2	M-M-LOK SOCKET	.111	.160	3 15/16
1-305183-1	M-M-LOK PIN	.087	.119	3 15/16
1-305183-0	NASA PATCH TIP	.113	.154	3 15/16
305183-7	8	.256	.284	4 1/8
305183-6	10	.227	.251	4 1/16
305183-5	12	.189	.206	4
305183-4	14	.162	.179	4
305183-3	16-20	.137	.155	3 15/16
305183-2	20	.103	.119	3 15/16
305183	16-20	.115	.129	3 15/16
	11			
PART NO.	SIZE	A	E	C

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

MATERIAL AND FINISH STEEL & ALUMINUM BLACK OXIDE		TE TE Connectivity	
WIRE — RANGE — INSULATION — # — # —		CLASS — # —	
TOLERANCE EXCEPT AS NOTED ± .015		TYPE — # —	
NAME TOOL — EXTRACTION		LOC M A NO 305183	

G2	REVISED PER ECO-11-005294	RK	HMR	05APR 11
TR	REVISION RECORD	DR	CHK	DATE
DR	DE	APP		
36	6/15/64			