


PRODUCT NUMBER
SEE TABLE

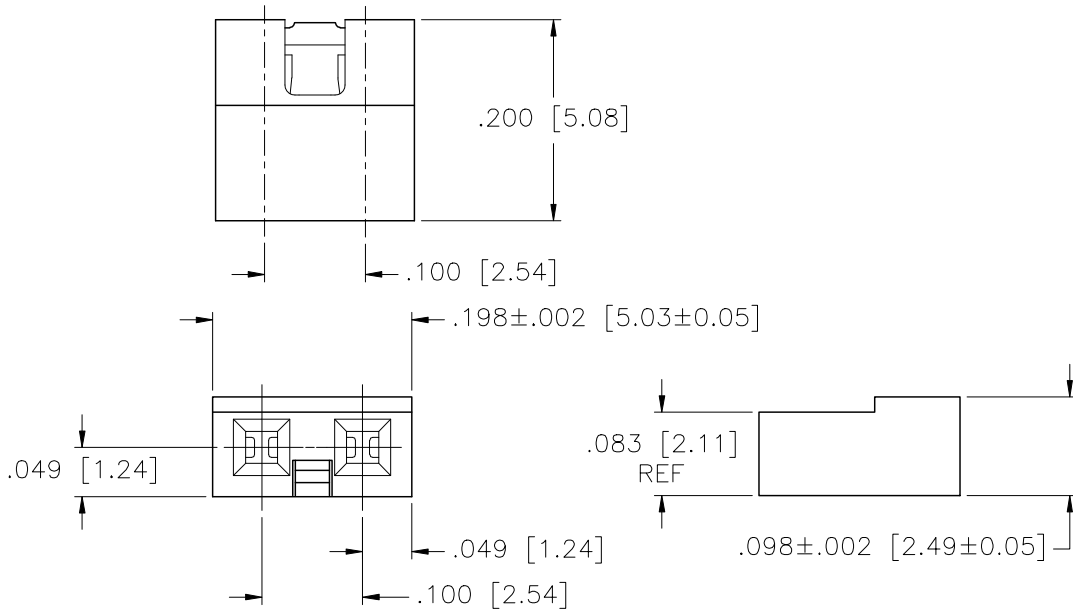

mal't. code		surface	tolerance	projection	product family
		ISO 1302	ISO 146 ISO 1001	ISO 1	JUMPER
Intolerances unless otherwise specified				INCH/MM	title
ltr	ecr no	dr	date	linear	1X2 LOW PROFILE JUMPER ASSEMBLY
J	V20973	GIP	7/17/02	XXX±.01/XXX±.03	dwg no
K	V03-1322	PJ	12/13/03	XXX±.005/XXX±.013	sheet 1 of 2
L	M05-0205	ERE	9/30/05	XXX±.0020/XXX±.005	size
M	M06-0238	MN	6/16/06	scale 1:1	A3
N	M06-0389	AGS	10/4/06	dr	R.EBY
P	M08-0209	MHT	7/18/08	chr	M.HAHN
R	M09-0065	MHT	4/13/09	appd	M.HAHN
sheet	revision	R	R		
index	sheet	1	2		

PRODUCT No.	CONTACT PLATING	HSG COLOR	LEAD FREE
68786-102	15u"/.38u Au OVER 50u"/1.27u Ni	WHITE	
-202	30u"/.76u Au OVER 50u"/1.27u Ni	WHITE	
-302	100u"/2.54u Sn	WHITE	
-402	Au FLASH OVER 50u"/1.27u Ni	BLACK	
-103	15u"/.38u Au	BLUE	NOTE 4
-203	30u"/.76u Au	BLUE	
-303	100u"/2.54u Sn	BLUE	
-403	Au FLASH OVER 50u"/1.27u Ni	BLUE	
-802	SAME AS -202 EXCEPT ADD SPECIAL MIL MARKING		
68786-204	30u"/.76u Au OVER 50u"/1.27u Ni	YELLOW	
68786-304	100u"/2.54u Sn	YELLOW	

OBSOLETE

OBSOLETE

OBSOLETE

NOTES:

- ① MATERIAL: POLYESTER, FLAME RETARDANT PER UL-94-V0 .
2. RECOMMENDED APPLICATION DATA:
 - A. ALL MATING PINS TO BE .025/.64 SQ ON TRUE CENTERS OF GIVEN TERMINAL SPACING WITHIN .015/.38 DIA .
 - B. SUGGESTED MATING PIN LENGTH .160/4.06 MIN .
- ③ ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

mal't. code		surface	tolerance	projection	product family
		ISO 1902	ISO 406 ISO 1001		JUMPER
lfr	ecn no	dr	date	title	
R				1X2 LOW PROFILE JUMPER ASSEMBLY	
		angles	linear	INCH/MM	scale
			.XX±.01/XX±0.3		1:1
			.XX±.005/XX±0.13		
			.000±.0020/XX±0.051		
dr		R.EBY	10/07/87	dwg no	
eng		M.HAHN	10/07/87	sheet 2 of 2 size	
chr		M.HAHN	10/07/87	68786 A3	
appd		M.HAHN	10/07/87	type	
				Product Customer Drawing	
sheet index	revision sheet				