

5

4

3









2

1

受控 CONTROLLED DOCUMENT					
编号 P/N	32-5994U L	版本 Rev	01	日期 Rel'd Date	SEP 14,09

DRAWING NO. 32-5994UL

REVISIONS					
01	OFFICIAL RELEASE	Y	T	T	Betty
	08-19-09	U	W		

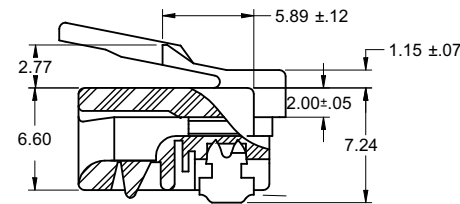

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS  
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS  
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100 MICRO-INCH NICKEL PLATING  
HOUSING MATERIAL: POLYCARBONATE  
DURABILITY: 1000 CYCLES MIN  
UL FLAMABILITY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL



Connectivity Solutions

TITLE RJ11 MOD PLUG FOR ROUND SOLID

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	BETTY.YU	09-15-05
X	± 0.5	CHECKED BY	DATE
X.X	± 0.15	TERRY.W	09-15-05
X.XX	± 0.10	APPROVED BY	DATE
ANGLES	± 0.5°	THOMAS	09-15-05
		U/M:	mm

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

SHEET 1 OF 1	DRAWING NO. 32-5994UL	SIZE C
--------------	-----------------------	--------

5

4

3

2

1