




Heyco® Reducer Snap Bushings

Mounting Diameter: .375" to 2.000"

- Converts raw-edged holes to smooth, neat, insulated holes.
- Locking fingers snap into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in multiple sizes for use in .375" (9,5 mm) to 2.000" (50,8 mm) diameter holes.
- For maximum inside diameters see Snap Bushings on pages 4-1 and 4-2.

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Maximum Thickness	Mounting Hole Diameter		Black	White	A Inside Diameter		B Head Diameter		C Overall Height			
	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.
.125	3,2	.375	9,5	2020	2021	SB 375-3	.187	4,8	.468	11,9	.406	10,3
.125	3,2	.437	11,1	2042	2037	SB 437-243	.243	6,2	.531	13,5	.406	10,3
.125	3,2	.437	11,1	2038	2039	SB 437-4	.270	6,8	.531	13,5	.406	10,3
.125	3,2	.500	12,7	2058	2059	SB 500-4	.250	6,4	.570	14,5	.406	10,3
.125	3,2	.500	12,7	2049	2050	SB 500-5	.312	7,9	.570	14,5	.406	10,3
.125	3,2	.562	14,3	2060	2061	SB 562-5	.312	7,9	.656	16,7	.406	10,3
.125	3,2	.562	14,3	2063	2064	SB 562-6	.391	9,9	.656	16,7	.406	10,3
.125	3,2	.625	15,9	2075	2078	SB 625-4	.250	6,4	.718	18,2	.406	10,3
.125	3,2	.625	15,9	2070	2071	SB 625-7	.437	11,1	.718	18,2	.406	10,3
.125	3,2	.687	17,4	2083	2084	SB 687-8	.500	12,7	.781	19,8	.406	10,3
.125	3,2	.750	19,1	2090	2091	SB 750-6	.391	9,9	.850	21,6	.406	10,3
.125	3,2	.750	19,1	2092	2099	SB 750-8	.500	12,7	.850	21,6	.406	10,3
.125	3,2	.750	19,1	2093	2094	SB 750-9	.562	14,3	.850	21,6	.406	10,3
.125	3,2	.812	20,6	2100	2101	SB 812-9	.562	14,3	.890	22,6	.406	10,3
.125	3,2	.875	22,2	2110	2111	SB 875-6	.375	9,5	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2113	2114	SB 875-7	.437	11,1	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2116	2117	SB 875-8	.500	12,7	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2120	2121	SB 875-9	.562	14,3	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2123	2124	SB 875-10	.625	15,9	.953	24,2	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2160	2161	SB 1093-13	.812	20,6	1.218	30,9	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2163	2164	SB 1093-14	.875	22,2	1.218	30,9	.453	11,5
.125	3,2	1.250	31,8	2198	2199	SB 1250-15	.937	23,8	1.359	34,5	.453	11,5
.125	3,2	1.375	34,9	2207	2208	SB 1375-14	.875	22,2	1.490	37,3	.453	11,5
.125	3,2	1.500	38,1	2233	2234	SB 1500-17	1.062	27,0	1.609	40,9	.453	11,5
.125	3,2	1.500	38,1	2236	2237	SB 1500-18	1.125	28,6	1.609	40,9	.453	11,5
.125	3,2	2.000	50,8	2400	2401	SB 2000-26	1.640	41,6	2.125	54,0	.453	11,5

Standard color black. Consult Heyco for white and other colors.
Locking fingers in fractional increment up to the maximum panel thickness.

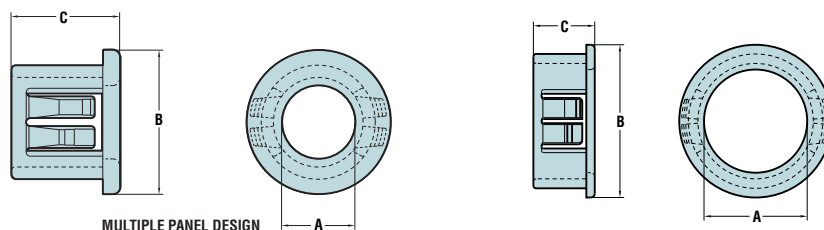

Quick Specs

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)