



RECOMMENDED PANEL CUTOUT

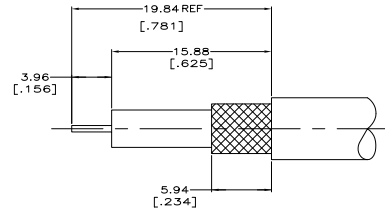

VIEW A

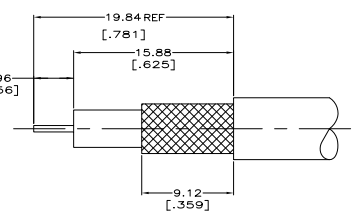

VIEW B

RECOMMENDED STRIP LENGTH

- △ MAX PANEL THICKNESS .240
- △ CRIMP TOOL: 220190-1
- △ BULK PACKAGE
- 4. USE INSTRUCTION SHEET 9763
- △ SPECIAL PACKAGING: BULK PACKAGE 25 PIECES

OBsolete	CUSTOM CABLE, C/C-24AWG, DOD-109, JOD-153	A	4.52 (178)	1.07 (.042)	852922-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	413746-5	413744-2	1-413590-7
NOT RELEASED	-	A	4.52 (178)	1.07 (.042)	852922-1	-	-	-	-	-	-	-	-	1-413590-6
NOT RELEASED	-	A	4.52 (178)	1.07 (.042)	852922-1	-	-	-	-	-	-	-	-	1-413590-5
OBsolete	JIS 3C-2V	A	4.52 (178)	1.07 (.042)	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-4	2-413746-5	413744-7	1-413590-4
OBsolete	BELDEN 8218 AND JIS 2.5C-2V	A	4.52 (178)	1.07 (.042)	852922-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	1-413746-0	413744-2	1-413590-3
OBsolete	JIS 2.5C-2W	A	5.41 (213)	1.07 (.042)	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-0	1-413746-0	413744-2	1-413590-2
OBsolete	JIS 3C-2W	A	6.48 (255)	1.07 (.042)	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-9	2-413746-5	413744-6	1-413590-1
OBsolete	ZENITH (C/C-.020, DOD-115, JOD-210)	A	5.41 (213)	1.07 (.042)	852922-1	-	-	-	-	-	8-221132-9	2-413746-5	413744-5	1-413590-0
OBsolete	RG-59 TYPE WITH .0031 C/C & BELDEN 9295,9266,9240	A	6.48 (255)	1.07 (.042)	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-1	2-413746-0	413744-1	413590-9
OBsolete	RG-179/U & 187/U	A	4.52 (178)	1.07 (.042)	852922-2	222001-6	227194-2	329633	1-329631-2	1-329632-2	9-413658-0	1-413746-5	413744-2	413590-8
OBsolete	AT&T 734A	A	6.48 (255)	1.07 (.042)	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-3	2-413746-0	413744-4	413590-7
OBsolete	TIMES RG-59 DOUBLE BRAIDED, 270 O.D.	A	8.23 (324)	1.07 (.042)	852922-3	-	-	329633	1-329631-2	1-329632-2	9-221132-2	413746-5	413744-1	413590-6
OBsolete	BELDEN 8281,9231 & AT&T 728 AND JIS 5C-2V	B	8.23 (324)	1.07 (.042)	852922-3	-	-	329633	1-329631-2	1-329632-2	9-221132-2	2-413746-0	413744-3	413590-5
OBsolete	AT&T KS 19224 L2 AND JIS 1.5C-XV	A	4.52 (178)	1.07 (.042)	852922-2	222001-6	227194-2	329633	1-329631-2	1-329632-2	9-413658-2	1-413746-5	413744-2	413590-4
OBsolete	BELDEN 8218 AND JIS 2.5C-2V	A	4.52 (178)	1.07 (.042)	852922-2	-	-	329633	1-329631-2	1-329632-2	9-221132-6	1-413746-0	413744-2	413590-3
OBsolete	RG-59/U,59A/U & 59B/U	A	6.48 (255)	1.07 (.042)	852922-1	-	-	329633	1-329631-2	1-329632-2	9-221132-1	413746-5	413744-1	413590-2
OBsolete	BELDEN 88241	A	6.48 (255)	1.07 (.042)	852922-1	-	-	329633	1-329631-2	1-329632-2	9-413658-3	413746-5	413744-1	413590-1

FOR USE WITH CABLE	VIEW	FERRULE (HEX) CONTACT (SQ) CRIMP HEIGHTS	DIE SET	⑧ TUBING, METAL QTY=1	⑦ TUBING, PLASTIC QTY=1	⑥ GASKET QTY=1	⑤ JAM NUT QTY=1	④ LOCKWASHER	③ FERRULE QTY=1	② CONTACT QTY=1	① JACK ASSY QTY=1	PART NUMBER
--------------------	------	--	---------	-----------------------	-------------------------	----------------	-----------------	--------------	-----------------	-----------------	-------------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.

INCHES	MILLIMETERS
1" = 25.4	1:1

TE Connectivity  
 JACK, BULKHEAD, 75 OHM, HEX CRIMP, ENG

SIZE: A1 00779 ©=413590

CUSTOMER DRAWING