

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		F	LNK	DESCRIPTION	DATE	BY	APP'D
AJ	16	A		REVISED PER EC 0514-0150-05	03OCT2005	REH	JL

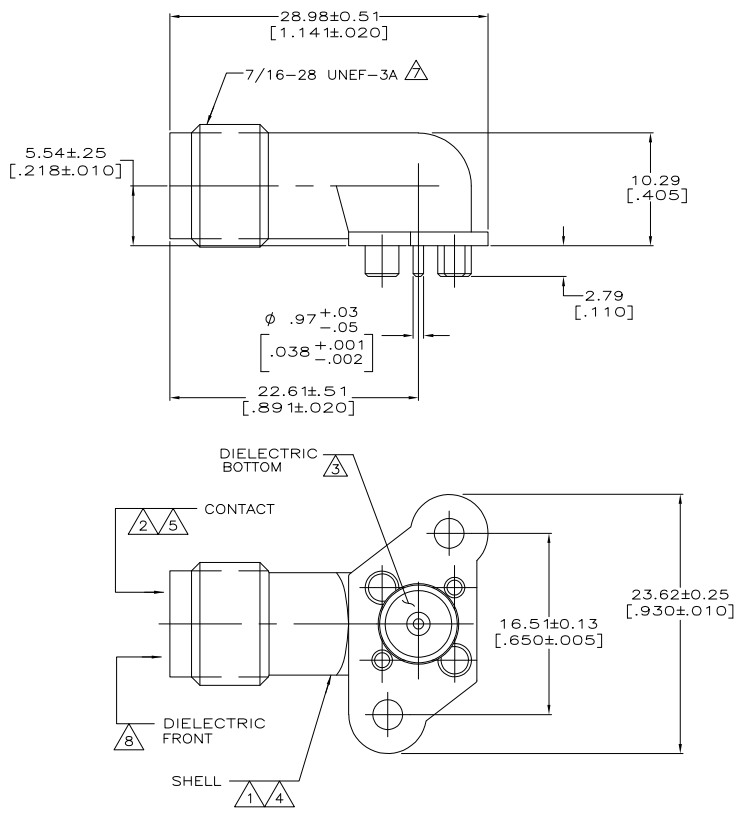

- △ ZINC PER QQ-Z-363
- △ BERYLLIUM COPPER PER ASTM B 1710
- △ PTFE PER ASTM D 1710
- △ NICKEL PLATE PER QQ-N-290, .0051 [.000200] MINIMUM THICKNESS
- △ GOLD PLATE PER ASTM B 488 .0013 [.000050] MINIMUM THICKNESS
- 6. INTERMATEABLE WITH PRODUCT PER MIL-C-39012
- △ MAJOR THREAD DIAMETER TO BE .437/.427, DIMENSION TO BE MEASURED 90° OPPOSITE THE PARTING LINE.
- △ POLYMETHYLPENTENE, GENERAL PURPOSE

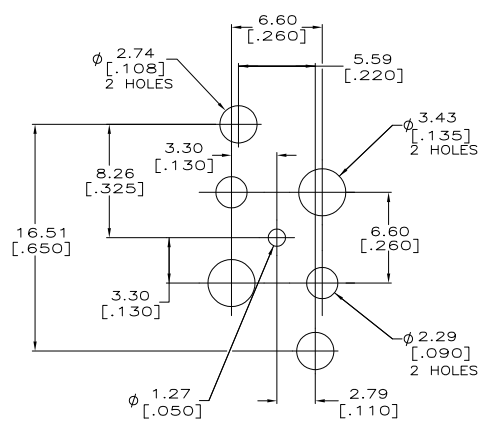

5413933-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN A FERNANDEZ 22APR2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK J HAVENER 22APR2005	WAVE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D J LIPPERT 22APR2005	PRODUCT SPEC	
0 PLC	±	APPLICATION SPEC		
1 PLC	±	WEIGHT		
2 PLC	±	CUSTOMER DRAWING		
3 PLC	±	SIZE CASE CODE DRAWING NO		
4 PLC	±	RESTRICTED TO		
ANGLE	±	SCALE 4:1 SHEET 1 of 1 REV A		
FINISH	△△△	A2 00779 C=5413933		

AMP 1471-9 REV 31MAR2000