


受控 CONTROLLED DOCUMENT					
编号	32-5954UL	版本	01	日期	May8,09
P/N		Rev		Rel'd Date	

DRAWING NO. 32-5945UL					
REVISIONS					
OFFICIAL RELEASE					
01	04-31-09	T	W	T	Thomas Chen

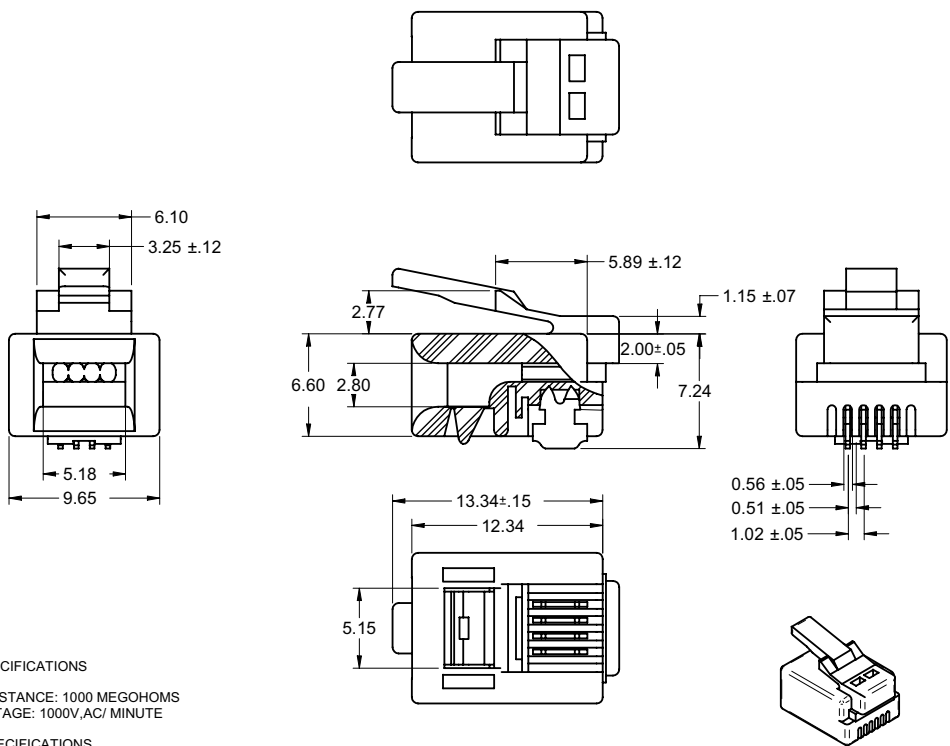

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100 MICRO-INCH NICKEL PLATING
HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABLY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1982

Solid Edge

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE	Connectivity Solutions
DECIMALS	mm	TERRY.W	04-31-09	
X	± 0.15	CHECKED BY	DATE	
XX	± 0.10	TERRY.W	04-31-09	
MATL		APPROVED BY	DATE	
		THOMAS	04-31-09	TITLE
FINISH		RELEASE DATE : 08-31-05		RJ11 MOD PLUG 50*U,STR,FLAT
U/M		mm	SCALE 4:1	
		SHEET 1 OF 1		DRAWING NO. 32-5954UL