

5

4

3








2

1

受控 CONTROLLED DOCUMENT					
编号 P/N	32-5964U L	版本 Rev	01	日期 Rel'd Date	SEP 14,09

DRAWING NO.
32-5964UL

REVISIONS					
01	OFFICIAL RELEASE	Y	W	T	
					Betty
					08-24-09
					-09 00

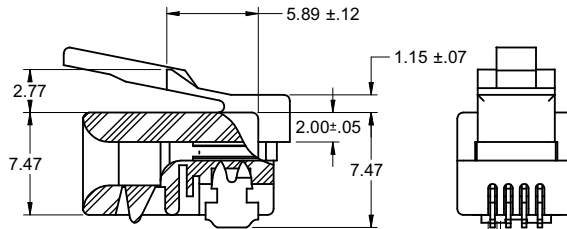

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V, AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
MICRO-INCH NICKEL PLATING

HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABILITY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

4. FOR SOLID OR STRANDED WIRE APPLICATIONS

5. FOR FLAT OVAL OR ROUND CABLE

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	BETTY.YU	08-20-09
X	± 0.5	CHECKED BY	DATE
X.X	± 0.15	TERRY.W	08-20-09
X.XX	± 0.10	APPROVED BY	DATE
ANGLES	± 0.5°	THOMAS	08-20-09
		U/M:	mm

EMERSON Network Power		Connectivity Solutions	
TITLE RJ11 MOD PLUG 50"U,STR,RND CBL			
SHEET 1 OF 1	DRAWING NO. 32-5964UL	SIZE C	

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

5

4

3

2

1