

5

4







3

2

1

受控 CONTROLLED DOCUMENT					
编号 P/N	32-5996U L	版本 Rev	01	日期 Rel'd Date	SEP 14,09

DRAWING NO. 32-5996U L				
REVISIONS				
01	OFFICIAL RELEASE	Y	T	08-25-09
		U	W	08-25-09
		F		08-25-09

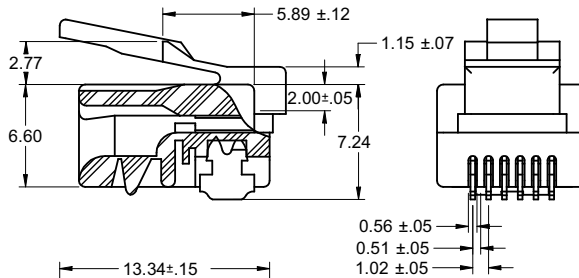

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V,AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100 MICRO-INCH NICKEL PLATING
HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABILITY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
		BETTY.YU	08-25-09
DECIMALS	mm	CHECKED BY	DATE
X	± 0.5	TERRY.W	08-25-09
X.X	± 0.15	APPROVED BY	DATE
X.XX	± 0.10	THOMAS	08-25-09
ANGLES	± 0.5°	U/M:	mm

EMERSON Network Power
Connectivity Solutions

TITLE RJ12 MOD PLUG 50"U,SOL/STR,FLT

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

SHEET	DRAWING NO.	SIZE
1 OF 1	32-5996U L	C

5

4

3

2

1