





受控 CONTROLLED DOCUMENT

编号 P/N	32-5998E U L	版本 Rev	01	日期 Rel'd Date	SEP 14,09
-----------	--------------	-----------	----	------------------	-----------

DRAWING NO.
32-5998EUL

REVISIONS

REV	RELEASE FOR QUOTATION	DATE	BY	APP'D	REASON
01		08-23-09			

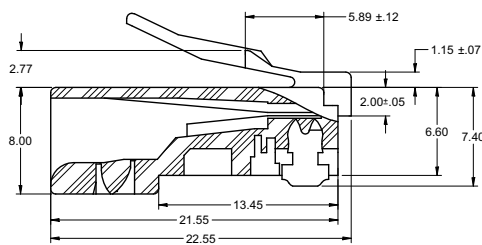

NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V.AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100 MICRO-INCH NICKEL PLATING




HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABILITY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

4. FOR FLAT OVAL OR ROUND CABLE

5. FOR SOLID OR STRANDED WIRE APPLICATIONS

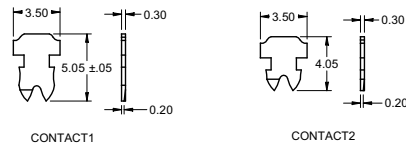

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	BETTY.YU	08-23-09
X	± 0.5	CHECKED BY	DATE
X.X	± 0.15	TERRY.W	08-23-09
XXX	± 0.10	APPROVED BY	DATE
ANGLES	± 0.5°	THOMAS	08-23-09
	UM	mm	

THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT SCALE DRAWING OR UPDATE MANUALLY.

EMERSON Network Power		Connectivity Solutions	
TITLE			
RJ45 MOD PLUG 50°U,SOL/STR,RND			
SHEET	DRAWING NO.	SIZE	
1 OF 1	32-5998EUL	C	