

Copyright FCI.

PRODUCT N°
98435-XXXLF



CONTACT PLATING OPTION
1= GXT 0.76 μm
3= 0.76 μm GOLD
5= 1.27 μm GOLD

PACKAGE OPTIONS
TAPE AND REEL PACKAGE 1= LOADED FACE UP
TAPE AND REEL PACKAGE 2= LOADED FACE DOWN


VERSION
TOP
BOTTOM

TERMINAL LOADING OPTIONS
1 = FULLY LOADED 8 POSITIONS
2 = ONLY POS 1,2,7,8 LOADED
3 = ONLY POS 3,4,5,6 LOADED

WHEN NEEDED, SUFFIX LETTER "LF" INDICATES THE PRODUCT IS ROHS COMPATIBLE SEE NOTE 7.



- NOTES:
- 1 - MATERIAL:
HOUSING: HIGH TEMP. PLASTIC, COLOR BLACK
TERMINAL PHOSPHOR BRONZE
 - 2 - PLATING
CONTACT AREA: OPTIONAL SEE TABLE
SOLDER TAIL: SnPb 90/10 2 μm MIN
 - NO RAW EDGES EXCEPT SOLDER TAILS TIPS
 - 3 - AREA FOR VACUUM PICK AND PLACE VENTURY
 - 4 - PACKAGING SPECIFICATION SEE TA 858
 - 5 - DIMENSION MEASURED FROM "A" TO THE TOP OF PRODUCT
 - 6 - COPLANARITY SEE TA 861.
 - 7 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE.
2 μm MINIMUM MATTE TIN OVER 1.27 μm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY:
- THE HOUSING WILL WITHSTAND EXPOSURE TO 245 °C PEAK TEMPERATURE FOR 30 SECONDS MAX IN A CONVECTION, INFRA-RED OR VAPOR PHASE OR REFLOW OVEN.
 - c - LABELLING:
- MEETS PACKAGING SPECS AS PER GS-14-920.
 - d - LEGAL STATEMENT: SEE GS-22-008

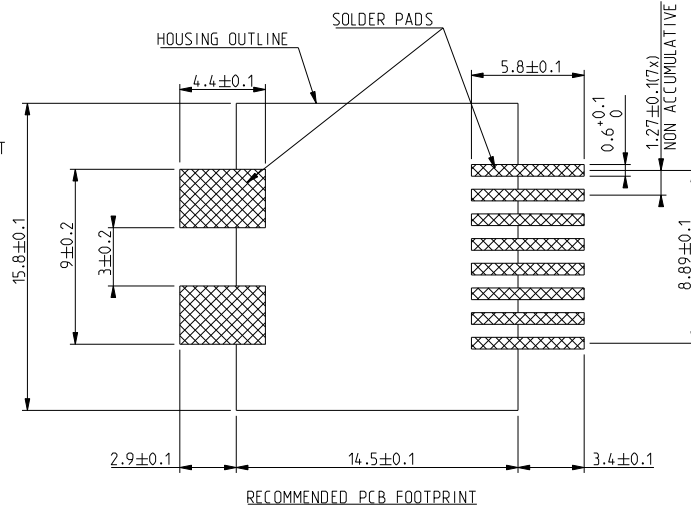

www.fciconnect.com			surface ISO 1302	tolerance std ±0.13 ±2*	projection ⊕	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED		Scale	
Dr	D LEGRAND	02.09.16	ANGULAR	0.x ±y	size	A3
Eng	P NIZZI	02.09.16	LINEAR	0.xx ±y	5:1	
Chr	D LEGRAND	02.09.16	0° ±y°	0.xxx ±y	ECN	F06-0242
Appr	P NIZZI	02.09.16	Product family	MODULAR JACK	Spec ref	-
FCI			title VERTICAL SMT 8 POSITIONS		catalog no	98435-XX(LF)
			customer		Rev.	N

98435-XX(LF) CUSTOMER sheet 2 of 2
PDM: Rev.N STATUS: Released Printed: Oct 01, 2010

Copyright FCI.