


ST 4-HESILED 24 (5X20)

Order No.: 3036547

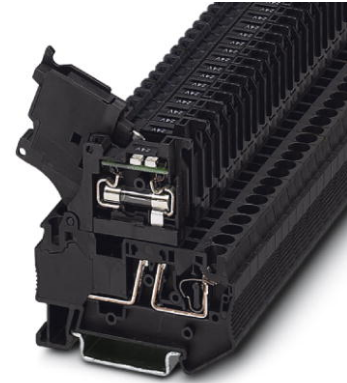

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3036547>

Fuse terminal block with LED for mounting on NS 35, for cartridge fuse inserts 5 x 20, 5 x 25 and 5 x 30 mm

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4017918890483 |
| Pack | 50 pcs. |
| Customs tariff | 85369010 |
| Weight/Piece | 0.015338 KG |
| Catalog page information | Page 113 (CL-2009) |

Product notes

WEEE/RoHS-compliant since:
07/20/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

| | |
|------------------------------------|-------|
| Number of levels | 1 |
| Number of connections | 2 |
| Color | black |
| Insulating material | PA |
| Inflammability class acc. to UL 94 | V0 |

Dimensions

| | |
|------------------|---------|
| Width | 6.2 mm |
| Length | 61.5 mm |
| Height NS 35/7,5 | 62.5 mm |
| Height NS 35/15 | 70 mm |

Technical data

| | |
|----------------------------------|--|
| Fuse | G / 5 x 20 |
| Fuse type | Glass |
| LED voltage range | 12 V AC/DC ... 30 V AC/DC |
| Rated surge voltage | 4 kV |
| Pollution degree | 3 |
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-3 |
| Nominal current I_N | 6.3 A (if used as disconnect terminal block. With fuse, the current is determined by the fuse used.) |
| Nominal voltage U_N | 30 V (if used as disconnect terminal block. With fuse, the voltage is determined by the light indicator used.) |
| LED voltage range | 12 V AC/DC ... 30 V AC/DC |
| LED current range | 3.5 mA ... 8.1 mA |

Connection data

| | |
|---|----------------------|
| Conductor cross section solid min. | 0.08 mm ² |
| Conductor cross section solid max. | 6 mm ² |
| Conductor cross section stranded min. | 0.08 mm ² |
| Conductor cross section stranded max. | 4 mm ² |
| Conductor cross section AWG/kcmil min. | 28 |
| Conductor cross section AWG/kcmil max | 10 |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.14 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 4 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.14 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 4 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm ² |

| | |
|---|------------------------|
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1 mm ² |
| Type of connection | Spring-cage connection |
| Stripping length | 10 mm |
| Internal cylindrical gage | A4 |

Certificates / Approvals



Certification CB, CSA, CUL, GL, GOST, KEMA, UL

CSA

| | |
|--------------------------------|-------|
| Nominal voltage U _N | 300 V |
| Nominal current I _N | 6.3 A |
| AWG/kcmil | 28-10 |

CUL

| | |
|--------------------------------|-------|
| Nominal voltage U _N | 300 V |
| Nominal current I _N | 10 A |
| AWG/kcmil | 28-10 |

UL

| | |
|--------------------------------|-------|
| Nominal voltage U _N | 300 V |
| Nominal current I _N | 10 A |
| AWG/kcmil | 28-10 |

Accessories

| Item | Designation | Description |
|-----------------|-------------|---|
| Assembly | | |
| 3030721 | ATP-ST 4 | Partition plate, Length: 61 mm, Width: 2 mm, Height: 42 mm, Color: gray |
| Bridges | | |
| 3030336 | FBS 2-6 | Cross connector/jumper for modular terminal block, Number of positions: 2, Color: red |
| 3030242 | FBS 3-6 | Cross connector/jumper for modular terminal block, Number of positions: 3, Color: red |

| | | |
|---------|----------|--|
| 3030255 | FBS 4-6 | Cross connector/jumper for modular terminal block, Number of positions: 4, Color: red |
| 3030349 | FBS 5-6 | Cross connector/jumper for modular terminal block, Number of positions: 5, Color: red |
| 3030271 | FBS 10-6 | Cross connector/jumper for modular terminal block, Number of positions: 10, Color: red |
| 3030365 | FBS 20-6 | Cross connector/jumper for modular terminal block, Number of positions: 20, Color: red |

Marking

| | | |
|---------|-------------------------|--|
| 0800190 | ZB 5 /VT-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: violet |
| 1050004 | ZB 5 :UNBEDRUCKT | Zack strip, unprinted, 10-section, for individual labeling with M-PEN, ZB-T or CMS system, pack is sufficient for 100 terminal blocks, for a terminal width of 5.2 mm, color: White |
| 1050127 | ZB 5,LGS:1-9 | Zack strip, printed horizontally: 9-section, with the numbers 1 - 9, color: white |
| 1050017 | ZB 5,LGS:FORTL.ZAHLEN | Zack strip, 10-section, printed horizontally: with the numbers, 1-10, 11-20 etc. up to 991-1000, color: white |
| 1050033 | ZB 5,LGS:GLEICHE ZAHLEN | Zack marker strip, labeled horizontally: 10-section, with identical numbers, 1/1/1, 2/2/2 etc. up to 500/500/500, color: white |
| 1050415 | ZB 5,LGS:L1-N,PE | Zack strip, printed horizontally, strips with 10 labels, L1, L2, L3, N, PE, L1, L2, L3, N, PE, color: white |
| 1050020 | ZB 5,QR:FORTL.ZAHLEN | Zack strip, 10-section, printed vertically: with consecutive numbers, 1-10, 11-20 a.s.o. up to 991-1000, color: white |
| 5061536 | ZB 5/BU-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: blue |
| 5061497 | ZB 5/GN-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: green |
| 1050211 | ZB 5/OG,LGS: 10-100 | Zack strip, printed horizontally: 10-section, with the numbers 10/20/30-100, (for decade labeling), color: orange |
| 5061471 | ZB 5/RD-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: red |
| 5060906 | ZB 5/WH-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, for a terminal width of 5.2 mm, color: White |
| 5061510 | ZB 5/YE-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: yellow |
| 1050295 | ZB 5:SO/CMS | Zack strip, 10-section, divisible, special printing, marking according to customer requirements |

| | | |
|---------|----------------------|--|
| 0807193 | ZBFM 6/OG:UNBEDRUCKT | Zack marker sheet, flat, unprinted: 100-section, 10 strips à 10 markers, sufficient for 100 terminal blocks, for all terminal blocks, pitch 6.2 mm, labeling with M-PEN or CMS system, color: orange |
| 0803618 | ZBFM 6/WH:UNBEDRUCKT | Zack marker sheet, flat, unprinted: 100-section, 10 strips à 10 markers, sufficient for 100 terminal blocks, for all terminal blocks, pitch 6.2 mm, labeling with M-PEN or CMS system, color: white |
| 0803650 | ZBFM 6:SO/CMS | Special printing, Zack marker sheet, flat, 100-section, divisible, marking according to customer requirements |

Tools

| | | |
|---------|---------------|---|
| 1204517 | SZF 1-0,6X3,5 | Screwdriver, blade: 0.6 x 3.5 x 100 mm, length 180 mm |
|---------|---------------|---|

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2009 Phoenix Contact
Technical modifications reserved;