


QTCS 1,5-TWIN


Order No.: 3206348

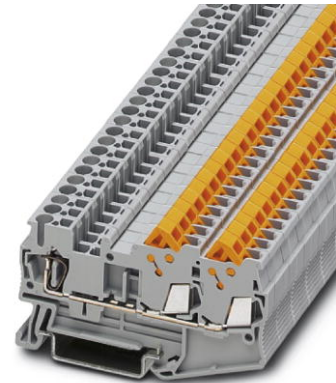

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3206348>


Feed-through modular terminal block, Connection type: Quick connection, Spring-cage connection, Cross-section: 0.25 mm² - 1.5 mm², Width: 5.2 mm, Color: gray, Mounting: NS 35/7.5, NS 35/15



| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  |
| sales group | A731 |
| Pack | 50 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 271 (CL1-2011) |

Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|-----------------------|--|
| General | |
| Note | The max. load current must not be exceeded by the total current of all connected conductors. |
| Number of levels | 1 |
| Number of connections | 3 |

| | |
|------------------------------------|------|
| Color | gray |
| Insulating material | PA |
| Inflammability class acc. to UL 94 | V0 |

Dimensions

| | |
|------------------|---------|
| Width | 5.2 mm |
| Length | 71.6 mm |
| Height NS 35/7.5 | 39.3 mm |
| Height NS 35/15 | 46.8 mm |
| End cover width | 2.2 mm |

Technical data

| | |
|----------------------------------|---|
| Maximum load current | 17.5 A (with 1.5 mm ² conductor cross section) |
| Rated surge voltage | 8 kV |
| Pollution degree | 3 |
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current I _N | 17.5 A |
| Nominal voltage U _N | 800 V |

Connection data

| | |
|--|----------------------|
| Conductor cross section solid min. | 0.25 mm ² |
| Conductor cross section solid max. | 1.5 mm ² |
| Conductor cross section stranded min. | 0.25 mm ² |
| Conductor cross section stranded max. | 1.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 16 |
| Connection method | Quick connection |
| Material wire insulation | PVC / PE |

Certificates / Approvals



Certification

CUL, GL, GOST, UL

Certification Ex: IECEx, KEMA-EX

Accessories

| Item | Designation | Description |
|-----------------|-----------------------------|--|
| Assembly | | |
| 3206212 | ATP-QTC TWIN | Partition plate, Length: 84.4 mm, Width: 2 mm, Height: 46 mm, Color: gray |
| 3022218 | CLIPFIX 35 | Snap-on end bracket, for 35 mm NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 8 and ZB 8/27, terminal strip marker KLM 2 and KLM, width: 9.5 mm, color: gray |
| 3022276 | CLIPFIX 35-5 | Snap-on end bracket, for NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 5 and ZBF 5, terminal strip marker KLM 2 and KLM, parking facility for FBS...5, FBS...6, KSS 5, KSS 6, width: 5,15 mm, color: gray |
| 3206403 | D-QTCS 1,5-TWIN | End cover, Length: 72.1 mm, Width: 2.2 mm, Height: 39.3 mm, Color: gray |
| 1201442 | E/UK | End clamp, for assembly on NS 32 or NS 35/7.5 DIN rail |
| 0801762 | NS 35/ 7,5 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 0801733 | NS 35/ 7,5 PERF 2000MM | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m |
| 0801681 | NS 35/ 7,5 UNPERF 2000MM | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1201756 | NS 35/15 AL UNPERF 2000MM | DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m |
| 1201895 | NS 35/15 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m |
| 1201714 | NS 35/15 UNPERF 2000MM | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m |
| 1201798 | NS 35/15-2,3 UNPERF 2000MM | DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m |
| Bridges | | |
| 3030161 | FBS 2-5 | Plug-in bridge, Number of positions: 2, Color: red |
| 3030174 | FBS 3-5 | Plug-in bridge, Number of positions: 3, Color: red |
| 3030187 | FBS 4-5 | Plug-in bridge, Number of positions: 4, Color: red |
| 3030190 | FBS 5-5 | Plug-in bridge, Number of positions: 5, Color: red |
| 3030213 | FBS 10-5 | Plug-in bridge, Number of positions: 10, Color: red |
| 3030226 | FBS 20-5 | Plug-in bridge, Number of positions: 20, Color: red |

Marking

| | | |
|---------|---------------|--|
| 0818108 | UC-TM 5 | UniCard materials for labeling terminal blocks with a marker groove,96-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white |
| 0824581 | UC-TM 5 CUS | UniCard sheets, for labeling terminal blocks with a zack marker strip groove, can be printed as per customer requirements |
| 0818153 | UC-TMF 5 | UniCard materials for labeling terminal blocks using a flat marker groove, 96-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white |
| 0824638 | UC-TMF 5 CUS | UniCard sheets, for labeling terminal blocks with a flat zack marker sheet groove, can be printed as per customer requirements |
| 0828734 | UCT-TM 5 | UniCard materials for thermal transfer printer, for labeling terminal blocks with a marker groove, 72-section, can be labeled with THERMOMARK CARD and BLUEMARK LED, color: white |
| 0829595 | UCT-TM 5 CUS | Terminal block marking, can be labeled as per customer specifications |
| 0828744 | UCT-TMF 5 | UniCard materials for thermal transfer printer, for labeling terminal blocks with a horizontal marker groove, 72-section, can be labeled with THERMOMARK CARD and BLUEMARK LED, color: white |
| 0829658 | UCT-TMF 5 CUS | Terminal block marking, can be labeled as per customer specifications |

Plug/Adapter

| | | |
|---------|-----------------|---|
| 3032871 | PAI-4-N GY | Test adapter, Color: gray |
| 3030983 | PS-5 | Test adapter, Color: red |
| 3030860 | RB ST 6-(2,5/4) | Reducing bridge, Number of positions: 2, Color: red |

Tools

| | | |
|---------|---------------|---|
| 1204517 | SZF 1-0,6X3,5 | Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip |
|---------|---------------|---|

Diagrams/Drawings

Circuit diagram



Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;