



Specifications


	Approvals / Other		
General Dimensional Electrical Physical	Certifications Features		
General			
Number of contacts	8		
Number of rows	2		
Orientation	Vertical		
Product Type	Crimp-to-Wire Housing		
Polarization (Key)	No		
Mating half	Mates with 0.64 mm (0.025 in.) Square Pin with Length of 5.33 mm (0.21 in.) min. to 6.1 mm (0.24 in.) max.		
Dimensional			
Length (Mating pin)	5.33 mm (0.21 in.) to 6.1 mm (0.24 in)		
Size (Wire)	22 to 36 AWG		
Electrical			
Resistance (Insulation)	100000 M ohms		
Voltage rating	1000V rms		
Physical			
Color (Housing)	Black		
Material (Housing)	PPE+PS		
Temperature (Range)	-40°C to +105°C		
Approvals / Certifications			
Approvals / Certifications	UL and CSA Approved		
Other Features			
Accessory	Polarization Plug 65307-001LF		
Packaging (Type)	Bag		
Comments	PV™ Contact Removal Tool: Part Number HT-0080		

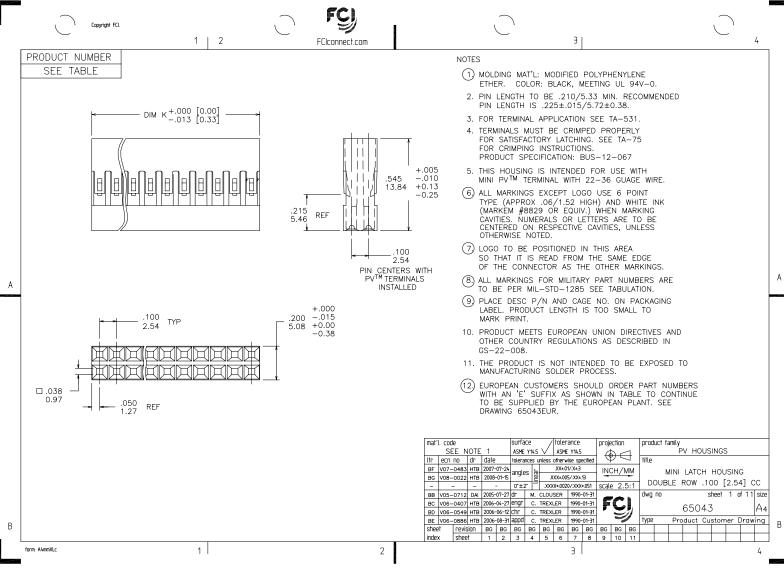


PDM: Rev:BG

STATUS: Released Printed: Feb 06, 2008

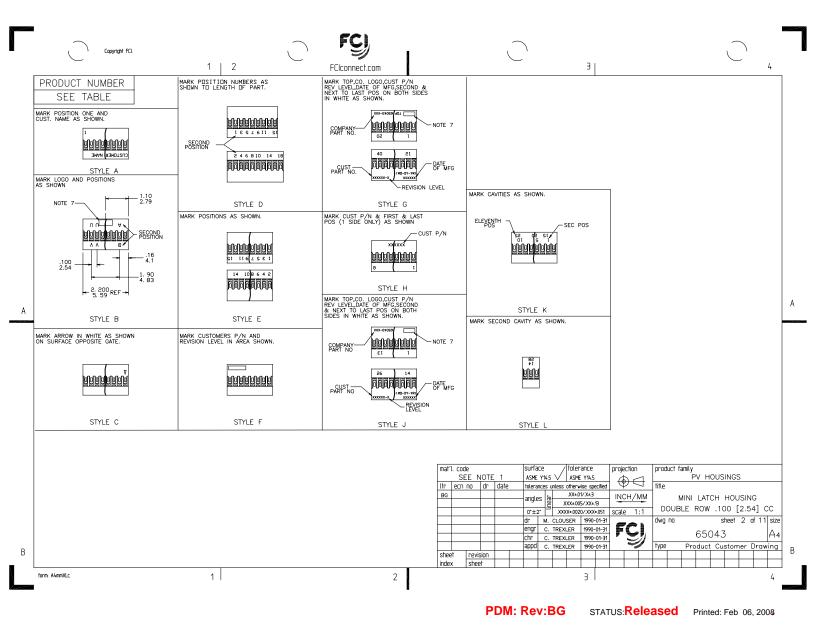


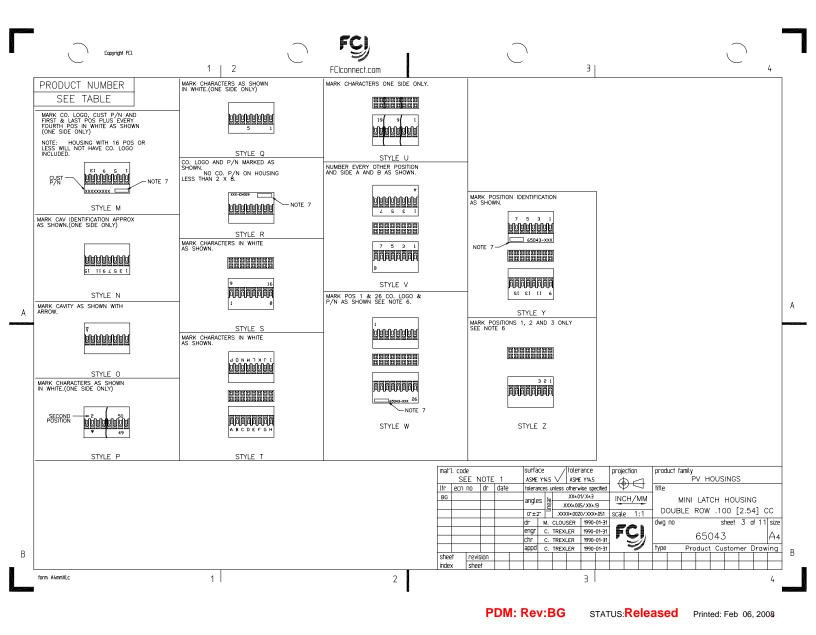

Downloaded from Elcodis.com electronic components distributor

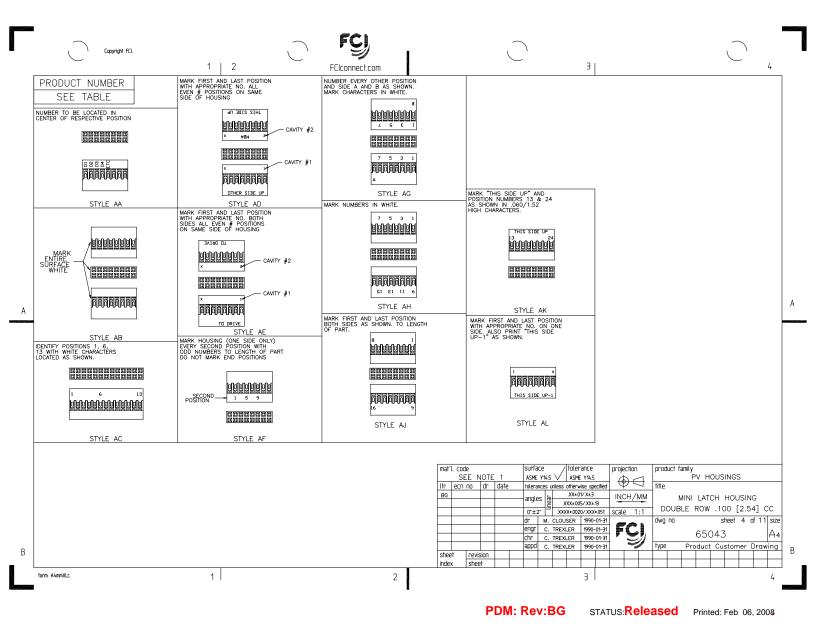

Downloaded from **Elcodis.com** electronic components distributor

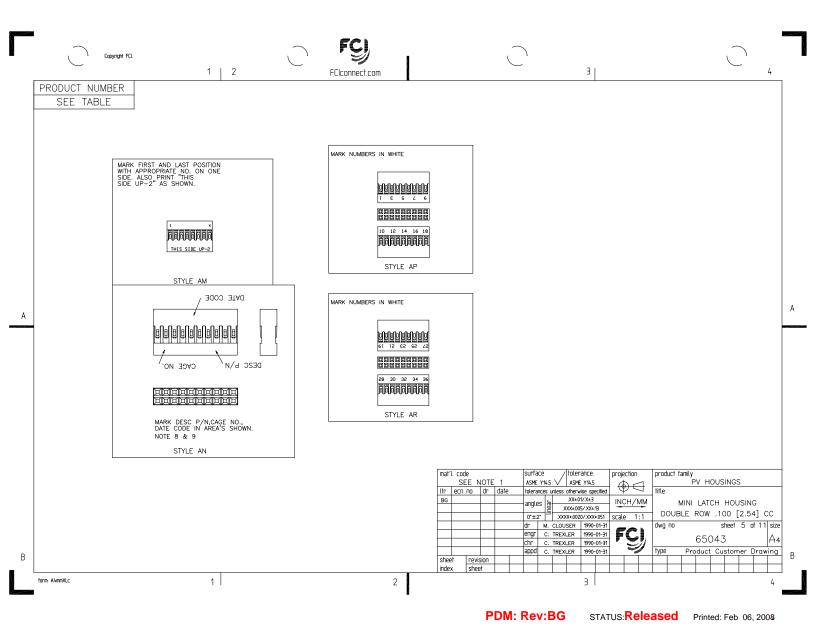

Downloaded from Elcodis.com electronic components distributor

	Copyrig	ht FCI.	1 2	FCIconnect.cc	۔ ۲ عال ۲ ع
	PRODUCT NO.	NO OF POS	DIM K	EUROPEAN VERSION-NOTE 12	
	65043-001LF	2 X 36	3.600/91.44	65043-001ELF	
	65043-002LF	2 X 35	3.500/88.90	65043-002ELF	
	65043-003LF	2 X 34	3.400/86.36	65043-003ELF	
	65043-004LF	2 X 33	3.300/83.82	65043-004ELF	
	65043-005LF	2 X 32	3.200/81.28	65043-005ELF	
	65043-006LF	2 X 31	3.100/78.74	65043-006ELF	
	65043-007LF	2 X 30	3.000/76.20	65043-007ELF	
	65043-008LF	2 X 29	2.900/73.66	65043-008ELF	
	65043-009LF	2 X 28	2.800/71.12	65043-009ELF	
	65043-010LF	2 X 27	2.700/68.58	65043-010ELF	
	65043-011LF	2 X 26	2.600/66.04	65043-011ELF	
	65043-012LF	2 X 25	2.500/63.50	65043-012ELF	
	65043-013LF	2 X 24	2.400/60.96	65043-013ELF	
	65043-014LF	2 X 23	2.300/58.24	65043-014ELF	
	65043-015LF	2 X 22	2.200/55.88	65043-015ELF	
А	65043-016LF	2 X 21	2.100/53.34	65043-016ELF	
	65043-017LF	2 X 20	2.000/50.80	65043-017ELF	
	65043-018LF	2 X 19	1.900/48.26	65043-018ELF	
	65043-019LF	2 X 18	1.800/45.72	65043-019ELF	
	65043-020LF	2 X 17	1.700/43.18	65043-020ELF	
	65043-021LF	2 X 16	1.600/40.64	65043-021ELF	
	65043-022LF	2 X 15	1.500/38.10	65043-022ELF	
	65043-023LF	2 X 14	1.400/35.56	65043-023ELF	
	65043-024LF	2 X 13	1.300/33.02	65043-024ELF	
	65043-025LF	2 X 12	1.200/30.48	65043-025ELF	
	65043-026LF	2 X 11	1.100/27.94	65043-026ELF	
	65043-027LF	2 X 10	1.000/25.40	65043-027ELF	
	65043-028LF	2 X 9	.900/22.86	65043-028ELF	mat/L code surface / tolerance projection product family
	65043-029LF	2 X 8	.800/20.32	65043-029ELF	SEE NOTE 1 ASME Y145 ASME Y145 PV HOUSINGS
	65043-030LF	2 X 7	.700/17.78	65043-030ELF	
	65043-031LF	2 X 6	.600/15.24	65043-031ELF	
	65043-032LF	2 X 5	.500/12.70	65043-032ELF	0*±2* 5000000000000000000000000000000000000
	65043-033LF	2 X 4	.400/10.16	65043-033ELF	
	65043-034LF	2 X 3	.300/7.62	65043-034ELF	CTIP C. TREXLER 1990-01-31
В	65043-035LF	2 X 2	.200/5.08	65043-035ELF	sheet revision
	form: A4mmXLc		1		2 3 3 4



STATUS: Released Printed: Feb 06, 2008