


PRODUCT NUMBER
71600-YXXLF



- LEAD FREE, SEE NOTE 6
- TOTAL NB OF POSITION 04 TO 64
SEE SHEET 2
- OPTIONAL STRAIN RELIEF
SEE SHEET 2

TRIANGLE INDICATES
POSITION 1
NOTE 5

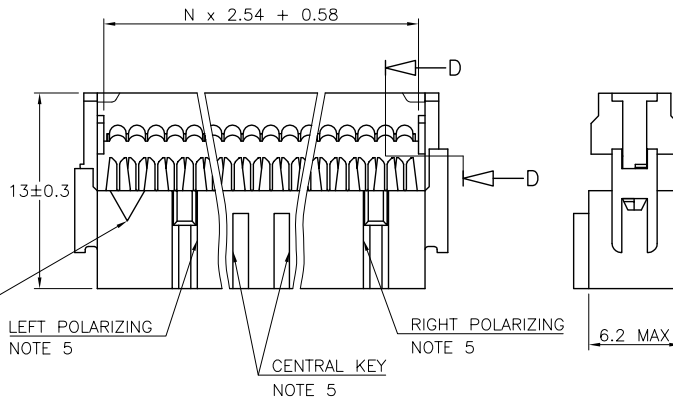

NOTES:

- 1 - PLASTIC MAT'L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 5 - 2x5, 2x6, 2x7 HAVE NO LEFT POLARIZING SLOT.
- 2x2, 2x3 WITH CENTRAL KEY HAVE NO TRIANGLE, NO LEFT AND RIGHT POLARIZING SLOT.
- 2x2 WITHOUT CENTRAL KEY HAS NO LEFT AND RIGHT POLARIZING SLOT.
- 2x3, 2x4 WITHOUT CENTRAL KEY HAVE NO LEFT POLARIZING SLOT
- 2x4 WITH CENTRAL KEY HAVE NO LEFT AND RIGHT POLARIZING SLOT
- 6 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS-22-008.
PACKAGING SPECIFICATION AS PER GS-14-920.

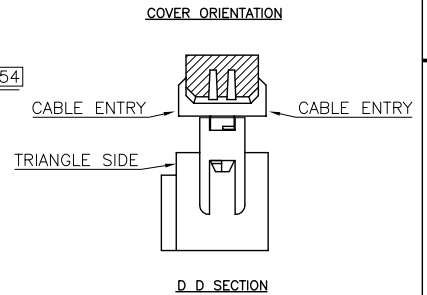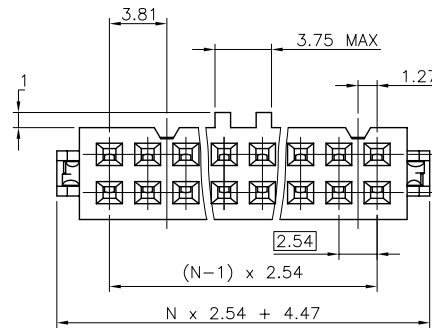

mat'l. code SEE NOTES		surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family 2.54MM IDC
Ltr	ecn no	dr	date	tolerances unless otherwise specified	title
AG	F04-0330	LMU	04.09.01	angles linear X.X ±0.3	QUICKIE III FEM
AH	F05-0109	JCO	05.01.17	X.XXX ±0.13	0.76µm Au
AJ	F05-0171	LMU	05.04.07	X.XXX ±0.05	scale 5:1
AK	F05-0180	LMU	05.04.22	dr D.LE 01.01.24	FCJ
AL	F06-0270	LMU	06.09.12	engr P.NZ 01.01.24	dwg no
AM	F06-0274	LMU	06.09.25	chr J.F.N 01.01.24	71600
AN	F09-0233	LMU	09.12.15	appd P.NZ 01.01.24	sheet 1 of 2
sheet index	revision	AN	AE		size
	1	2			A3
					type
					CUSTOMER Drawing

PDM: Rev:AN

STATUS:Released

Printed: Feb 20, 2010


CORE RANGE	
STRAIN RELIEF	Nbr OF POSITIONS
0/1	04
0/1	06
0/1	08
0/1	10
0/1	14
0/1	16
0/1	18
0/1	20
0/1	24
0/1	26
0/1	30
0/1	34
0/1	40
0/1	50
0/1	60
0/1	64

CATALOGUE RANGE	
STRAIN RELIEF	Nbr OF POSITIONS
2/6	04
2/6	06
2/6	08
2/6	10
2/6	14
2/6	16
2/6	18
2/6	20
2/6	24
2/6	26
2/6	30
2/6	34
2/6	40
2/6	50
2/6	60
2/6	64


PLATING
0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT

PLATING
0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT


624
304
204 / 224
004
DASHES NOT AVAILABLE




WITHOUT STRAIN RELIEF




WITH LOW PROFILE STRAIN RELIEF



WITH STANDARD STRAIN RELIEF



WITH LATCHING STRAIN RELIEF

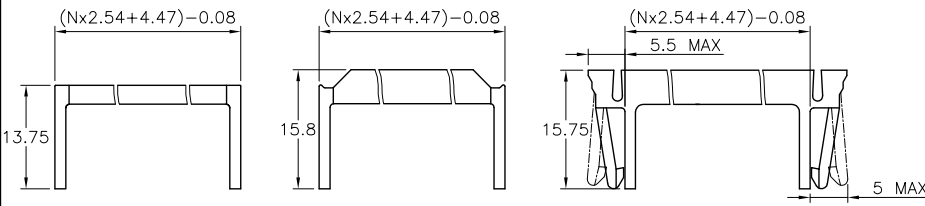

LOW PROFILE STRAIN RELIEF

STANDARD STRAIN RELIEF

LATCHING STRAIN RELIEF FOR SLIM HEADER

PRODUCT NUMBER	CENTRAL KEY		STRAIN RELIEF			
	WITH	WITHOUT	STANDARD	WITHOUT	LOW PROFILE	LATCHING
71600-6YYLF	●		●			●
71600-3YYLF		●	●			
71600-2YYLF	●				●	
71600-1YYLF	●			●		
71600-0YYLF	●		●			

mat'l. code		surface	tolerance	projection	product family
		ISO 1302	ISO 406 ISO 1101	mm	QUICKIE
Ltr	ecn no	dr	date	angles	linear
X	F70666	AAN	97.11.05		
Y	F10121	DLE	01.01.24		
AA	F10199	GCO	01.04.26		
AB	F03019	DLE	03.01.23	dr	D.LE
AC	F05-018d	LMU	05.04.22	engr	P.NZ
AD	F06-027d	LMU	06.09.12	chr	J.F.N
AE	F06-027d	LMU	06.09.25	appd	P.NZ
sheet	revision	sheet			
index					



title: IDC RECEPT DR
dwg no: 71600
sheet 2 of - size: A3
type: CUSTOMER Drawing