


## UM 25-18 MSTB/FRONT/Q

Order No.: 2959502


The illustration shows version UM 25-10 MSTB/FRONT/Q

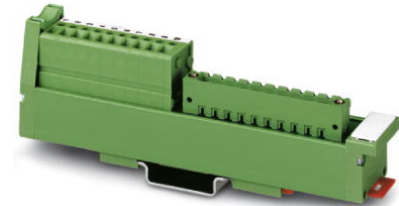


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2959502>

VARIOFACE SLIM LINE, with screw connection and COMBICON header, for assembly at a right angle on NS 35/7.5, 18 positions



Commercial data	
GTIN (EAN)	
Note	Made-to-order
sales group	I120
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 321 (IF-2011)

Product notes
WEEE/RoHS-compliant since: 12/06/2006 

<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General data</b>	
Nominal voltage $U_N$	250 V AC/DC
Max. current carrying capacity per branch	2.5 A
Number of positions	18

Width	25 mm
Height	217 mm
Depth	45 mm
Ambient temperature (operation)	-10 °C ... 50 °C
Ambient temperature (storage/transport)	-10 °C ... 70 °C
Test voltage	1.5 kV (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	III

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	COMBICON connection
Connection method	Pluggable

#### Certificates / Approvals




Certification

GOST

## Diagrams/Drawings

### Circuit diagram

---

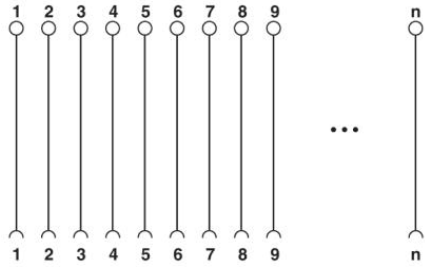

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;