


FLKM 14/LA/PLC

Order No.: 2284565

The illustration shows version FLKM 50/PLC

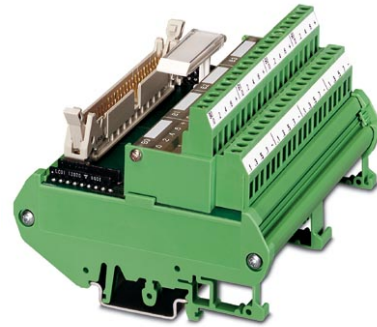


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2284565>

VARIOFACE interface module, with LED, for 8 channels



Commercial data

| | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 055738 |
| sales group | I630 |
| Pack | 5 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 196 (IF-2007) |

Product notes

WEEE/RoHS-compliant since:
09/04/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|---|---------------------------|
| Nominal voltage U_N | 20 V DC (up to 26.5 V DC) |
| Max. current carrying capacity per branch | 1 A |
| Max. total current of voltage supply | 3 A |
| Number of positions | 14 |
| Width | 45 mm |

| | |
|---|-----------------------|
| Height | 90 mm |
| Depth | 68 mm |
| Status display | LED |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Test voltage | 500 V (50 Hz, 1 min.) |
| Mounting position | Any |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| | IEC 62103 |
| Pollution degree | 2 |
| Surge voltage category | II |

Connection data

| | |
|--|--|
| Connection 1 | Field level |
| Connection in acc. with standard | IEC / EN |
| Connection method | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Connection 2 | Control system level |
| Number of connections | 1 |
| Connection method | Flat-ribbon cable plug connector in acc. with IEC 60603-13 |
| Number of positions | 14 |

Certificates / Approvals




Certification

CUL, GOST, UL

Diagrams/Drawings

Circuit diagram

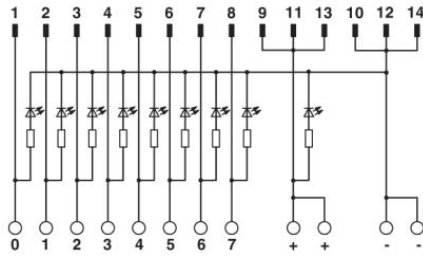

Connection scheme: FLKM 14/LA/PLC

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;