



Current refinements (click  to remove)

[Search Tips](#) 
 Region  USA  Product Family  Locking Fork Terminal, Vinyl Insulated – Funnel Entry  Text Search: 'PV14-6LF-C'

**Your search criteria matched only one product, shown below.**


- Locks in place for secure connection
- Fork design provides for fast and easy installation, without the need to remove fastener
- Insulation support helps to prevent wire damage in bending applications
- UL Flammability UL 94V-0, maximum insulation temperature 221°F (105°C)
- Internal barrel serrations assure good wire contact and maximum tensile strength
- UL and CSA rated to 600 V per UL 486

‡UL and CSA approved tooling/product combinations.

|                         |  |
|-------------------------|--|
| Part Number:            | PV14-6LF-C   |
| RoHS Compliancy Status: | Compliant  |
| Part Description:       | Locking Fork Terminal, vinyl insulated, funnel entry, 18 – 14 AWG, #6 stud size. |
| Product Type:           | Terminals  |
| CSA Certified:          | Yes  |
| UL Listed:              | Yes  |
| Length (In.):           | .90  |
| Width (In.):            | .25  |
| Clearance:              | .22  |
| Max. Ins.:              | .170   |
| Panduit Color Code:     | Blue   |
| Stock:                  | .03  |
| Stud Size:              | #6   |
| Tool:                   | CT-100A‡, CT-600-A‡, CT-1550‡, CT-1551‡, CT-2500‡                                |
| Wire Range:             | 18 – 14 AWG  |
| Min. Order UOM:         | PC   |
| Min. Order Qty.:        | 100  |

BOM Qty. (# of Pkgs.)

[Add to My Catalog](#)


 Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'My Catalog' features.

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NUMBER | STUD SIZE | DIMENSIONS in. |               |               |                |               |
|---------------------|-----------|----------------|---------------|---------------|----------------|---------------|
|                     |           | A $\pm .03$    | W $\pm .01$   | C $\pm .02$   | M $\pm .03$    | H $\pm .01$   |
| PV14-6LF            | #6        | .90<br>(22.86) | .25<br>(6.35) | .22<br>(5.59) | .68<br>(17.27) | .14<br>(3.56) |
| PV14-6LFW           | #6        | .90<br>(22.86) | .29<br>(7.37) | .22<br>(5.59) | .68<br>(17.27) | .14<br>(3.56) |
| PV14-8LF            | #8        | .97<br>(24.64) | .29<br>(7.37) | .25<br>(6.35) | .73<br>(18.54) | .16<br>(4.06) |
| PV14-10LF           | #10       | .97<br>(24.64) | .33<br>(8.38) | .25<br>(6.35) | .73<br>(18.54) | .19<br>(4.83) |
| PV14-10LFN          | #10       | .97<br>(24.64) | .29<br>(7.37) | .25<br>(6.35) | .73<br>(18.54) | .19<br>(4.83) |

NOTES:

- UL LISTED & CSA CERTIFIED FOR
  - 600 V. MAX. VOLTAGE RATING (1000 V. MAX. IN SIGNS, FIXTURES AND LUMINAIRES.)
  - 18-14 AWG SOLID OR STRANDED COPPER WIRE & 221°F (105°C) MAX TEMP RATING, WITH THE CT-500 & CT-550, CT-1550, CT-1551 INSTALLATION TOOLS.
  - 16-14 AWG SOLID OR STRANDED COPPER WIRE & 167°F (75°C) MAX TEMP RATING WITH THE CT-100 INSTALLATION TOOLS.
- MATERIAL:
  - STAMPING - .032 (.81) THK COPPER, TIN PLATED
  - HOUSING - VINYL, BLUE
- STRIP LENGTH 5/16 <sup>+1/32</sup> 0
- PACKAGE QTY.: -C=100/-M=1000
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

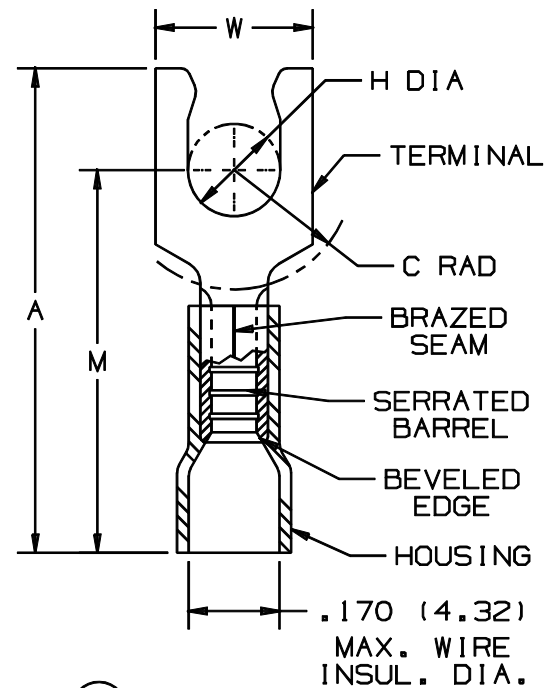

LISTED  
587H  
E52164



CERTIFIED  
LR31212

A41296\_09

|     |      |     |                              |                              |       |      |  |                 |              |               |                       |
|-----|------|-----|------------------------------|------------------------------|-------|------|--|-----------------|--------------|---------------|-----------------------|
| 09  | 1-01 | RM  | FILESPEC WAS N41296AA_PCD_08 |                              |       |      | <b>PANDUIT</b> CORP. TINLEY PARK, ILLINOIS   |                 |              |               |                       |
| 08  |      | JKD | ADDED CT-1550 & CT-1551      | 07634                        |       |      |  |                 |              |               |                       |
| 7   | 1-95 | MC  | RLS                          | UPDATED NOTES AND DIMENSIONS | 02896 | LCA  | #16-14 BARREL FUNNELED VINYL INSULATED LOCKING FORK, .175 (4.45) MAX. WIRE INSULATION DIAMETER |                 |              |               |                       |
| 6   | 8-88 | DW  |                              | REDRAWN WITH REVISIONS       |       | JRB  |  |                 |              |               |                       |
| REV | DATE | BY  | CHK                          | DESCRIPTION                  | ECN # | CUST | PM   | DRAWN BY<br>DAW | CHK'D<br>CJH | SCALE<br>NONE | DRAWING NO.<br>A41296 |