



SST1M-C




- For indoor use
- Used for normal bundling and through-panel applications
- Small head height allows more efficient use of space in compact areas
- Exclusive two-piece design offers the lowest threading force in the industry
- Average 14% lighter than one-piece cable ties
- Releasable prior to final tensioning for bundle modifications
- Straight Tip design

Part Number	SST1M-C
RoHS Compliancy Status	Compliant
Part Description	Cable Tie, Releasable, 4.0", Miniature cross section
Product Type	Cable Ties
Material	Nylon 6.6
Color	Natural
CSA Certified	Yes
Mil. Std. Part Number	MS3367-4-9
UL Listed (File #E56854)	No
UL Recognized (File #E56854)	Yes
Length (In.)	4.0
Length (mm)	102
Width (In.)	.095
Width (mm)	2.4
CE Compliant	Yes
Cross Section	Miniature
Head Height (In.)	.150
Head Height (mm)	3.8
Head Width (In.)	.175
Head Width (mm)	4.5
Locking Style	Releasable
Material Flammability Rating	UL 94V-2
Max. Bundle Diameter (In.)	.78
Max. Bundle Diameter (mm)	20
Max. Continuous Use Temperature	185°F (85°C)
Min. Loop Tensile Strength (Lbs.)	18

• Min. Loop Tensile Strength (N)	80
• Pricing Description	Cable Tie, 2-Piece, 4.0"L (102mm), Miniature, Nylon, Natural
• Thickness (In.)	.035
• Thickness (mm)	.9
• Tool	GTS, GTSL, GS2B, PTS, PPTS, STS2
• Min. Order UOM	PC
• Min. Order Qty.	100
• BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

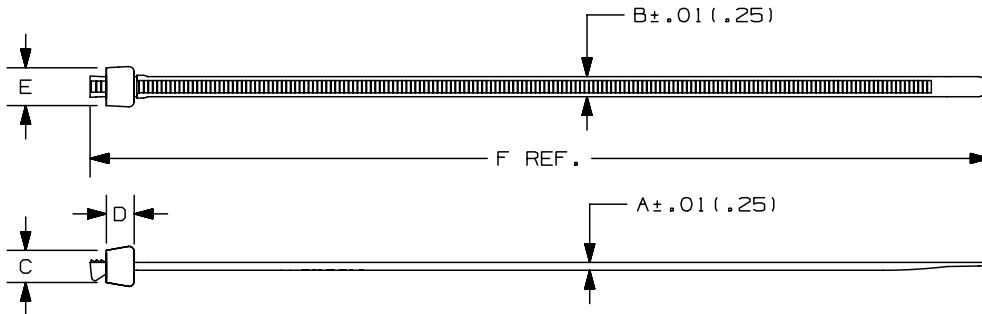

PANDUIT PART NO.*	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS-SECTION	WEIGHT lbs./100pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
SST1M	.06 (1.5)	.78 (20)	.035 (.9)	.095 (2.4)	.150 (3.8)	.125 (3.2)	.175 (4.5)	4.0 (102)	18 (80)	MINIATURE	.06 (25)
SST1.5M	.06 (1.5)	1.25 (32)	.037 (.9)	.095 (2.4)	.150 (3.8)	.125 (3.2)	.175 (4.5)	5.5 (140)	18 (80)	MINIATURE	.07 (32)
SST1.5I	.06 (1.5)	1.25 (32)	.037 (.9)	.135 (3.4)	.210 (5.3)	.147 (3.7)	.240 (6.1)	5.3 (137)	40 (178)	INTERMEDIATE	.12 (55)
SST2I	.06 (1.5)	2.00 (51)	.040 (1.0)	.135 (3.4)	.210 (5.3)	.147 (3.7)	.240 (6.1)	8.1 (206)	40 (178)	INTERMEDIATE	.17 (77)
SST3I	.06 (1.5)	3.00 (76)	.040 (1.0)	.135 (3.4)	.210 (5.3)	.147 (3.7)	.240 (6.1)	11.0 (279)	40 (178)	INTERMEDIATE	.24 (110)
SST4I	.06 (1.5)	4.00 (102)	.040 (1.0)	.135 (3.4)	.210 (5.3)	.147 (3.7)	.240 (6.1)	14.7 (375)	40 (178)	INTERMEDIATE	.31 (142)

NOTES:

- *1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

PANDUIT CORP. TINLEY PARK, ILLINOIS

**STA-STRAP CABLE TIES
SS SERIES**

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .0005 (XXX) ± .020(.51)
(.XX) ± .02(.5) ANGLES ± .0005

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
JABO

MAT'L:

SCALE
NONE

DATE
11-27-01

NYLON 6.6

DRAWING NO.
SS-5550

DWG
SIZE
A

CHK'D
SP

SHEET 1 OF 3

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
5	4-19-05	ERW		METRIC CONVERSION CORRECTIONS	5550	5		