



SSM2S-C





- Natural Nylon material for indoor use
- Weather Resistant material has greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Used to fasten and identify bundles at the same time
- Unique design allows tie to be used as a wrap-around or flag marker
- Can be marked with *PANDUIT* Marker Pens or custom imprinted with text, symbols or trademarks available using *PANDUIT* Custom Hot Stamping Service

Part Number	SSM2S-C
RoHS Compliancy Status	Compliant
Part Description	Marker Tie, Flag/Wrap, Releasable, 6.7", Standard cross section
Product Type	Cable Ties
Material	Nylon 6.6
Color	Natural
CSA Certified	Yes
Mil. Std. Part Number	MS3368-1-9B
UL Listed (File #E56854)	No
UL Recognized (File #E56854)	Yes
Length (In.)	6.7
Length (mm)	170
Width (In.)	.180
Width (mm)	4.6
CE Compliant	Yes
Cross Section	Standard
Head Height (In.)	.165
Head Height (mm)	4.2
Head Width (In.)	.410
Head Width (mm)	10.4
Locking Style	Releasable
Marker Type	Wrap / Flag
Marker Write-On Area (In.)	.44 x .96
Marker Write-On Area (mm)	11.2 x 24.4
Material Flammability Rating	UL 94V-2
Max. Bundle Diameter (In.)	1.75

▪ Max. Bundle Diameter (mm)	45
▪ Max. Continuous Use Temperature	185°F (85°C)
▪ Min. Loop Tensile Strength (Lbs.)	50
▪ Min. Loop Tensile Strength (N)	222
▪ Pricing Description	Marker Tie, 2-Piece, 6.7"L (170mm), Standard, Nylon, Natural
▪ Thickness (In.)	.045
▪ Thickness (mm)	1.1
▪ Tool	GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2
▪ Min. Order UOM	PC
▪ Min. Order Qty.	100
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

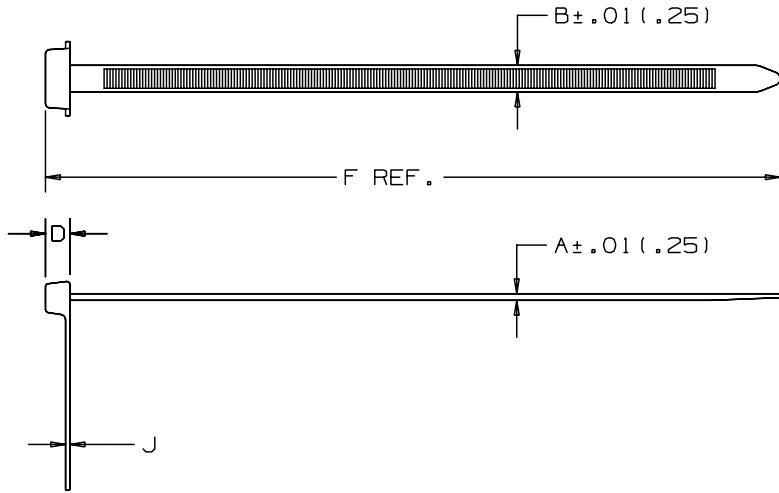

PANDUIT PART NO.*	BUNDLE DIA.		A	B	C	D	E	F	G	H	J	WRITE-ON AREA	MIN. LOOP TENSILE	CROSS- SECTION	WEIGHT
	MIN. in. (mm)	MAX. in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	lbs (N)		lbs/100pcs. (g)
SSM2S	.06 (1.5)	1.75 (45)	.045 (1.1)	.180 (4.6)	.230 (5.8)	.165 (4.2)	.410 (10.4)	6.7 (170)	.50 (12.7)	1.18 (30)	.030 (.8)	.44 x .96 (11.2 x 24.4)	50 (222)	STANDARD	.29 (132)
SSM4S	.06 (1.5)	4.00 (102)	.045 (1.1)	.180 (4.6)	.230 (5.8)	.165 (4.2)	.410 (10.4)	14.9 (378)	.50 (12.7)	1.18 (30)	.030 (.8)	.44 x .96 (11.2 x 24.4)	50 (222)	STANDARD	.55 (249)

NOTES:

- *1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

PANDUIT CORP. TINLEY PARK, ILLINOIS

STA-STRAP MARKER TIE
SSM SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± ---- (.XXX) ± .020 (.5)
(.XX) ± .02 (.5) ANGLES ± ----

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
RTF/AJC

MAT'L:

SCALE

NONE

DATE

8-8-66

NYLON 6.6

DRAWING NO.

SS-630

DWG

SIZE

A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
10	5/31/05	ERW		METRIC CONVERSION CORRECTIONS	630	10		