




G4X4WH6




- Choose from 36 sizes of *PANDUIT*® Type G Wiring Duct from 0.5" x 0.5" up to 6" x 4" in popular colors. Used for general purpose control panel wiring and to route and protect wiring in communication closets. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.
- **Specifications**
 - Made of lead-free PVC
 - UL Recognized continuous use temperature: 122 °F (50°C)
 - UL94 Flammability Rating of V-0
 - Conforms with NFPA 79-2002 section 14.3.1 requirement for flame retardant material
 - Provided with mounting holes
- **Features and Benefits**
 - Wide finger/slot design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes
 - *PANDUIT*® exclusive rounded edges protects hands and wiring/cabling from abrasion
 - Non-slip cover stays in place during shipment, vibration and when in vertical orientation, eliminating rework
 - Flush design holds 10-12% more wires than traditional duct designs
 - Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
 - Specially formulated lead-free material eliminates health concerns associated with PVC that contains lead
 - Restricted slot design retains wire in slot for fast, easy wire installation or removal
- Base and cover sold separately.

▪ Part Number	G4X4WH6
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Wide finger, slotted wiring duct.
▪ Material	Lead-Free PVC
▪ Color	White
▪ CSA Certified	Yes
▪ UL Recognized (File No. E147128)	Yes
▪ Length (ft.)	6
▪ CE Marking	Yes
▪ Duct Size W x H (In.)	4.25 x 4.10
▪ Duct Size W x H (mm)	108.0 x 104.1
▪ Mounting Method	Standard Mounting Holes
▪ Pricing Description	Slotted Duct, PVC, 4"X4"X6', WHT
▪ Slot Width (In.)	0.31

▪ Slot Width (mm)	7.9
▪ Cover Part Number	C4WH6
▪ Min. Order UOM	FT
▪ Min. Order Qty.	6
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

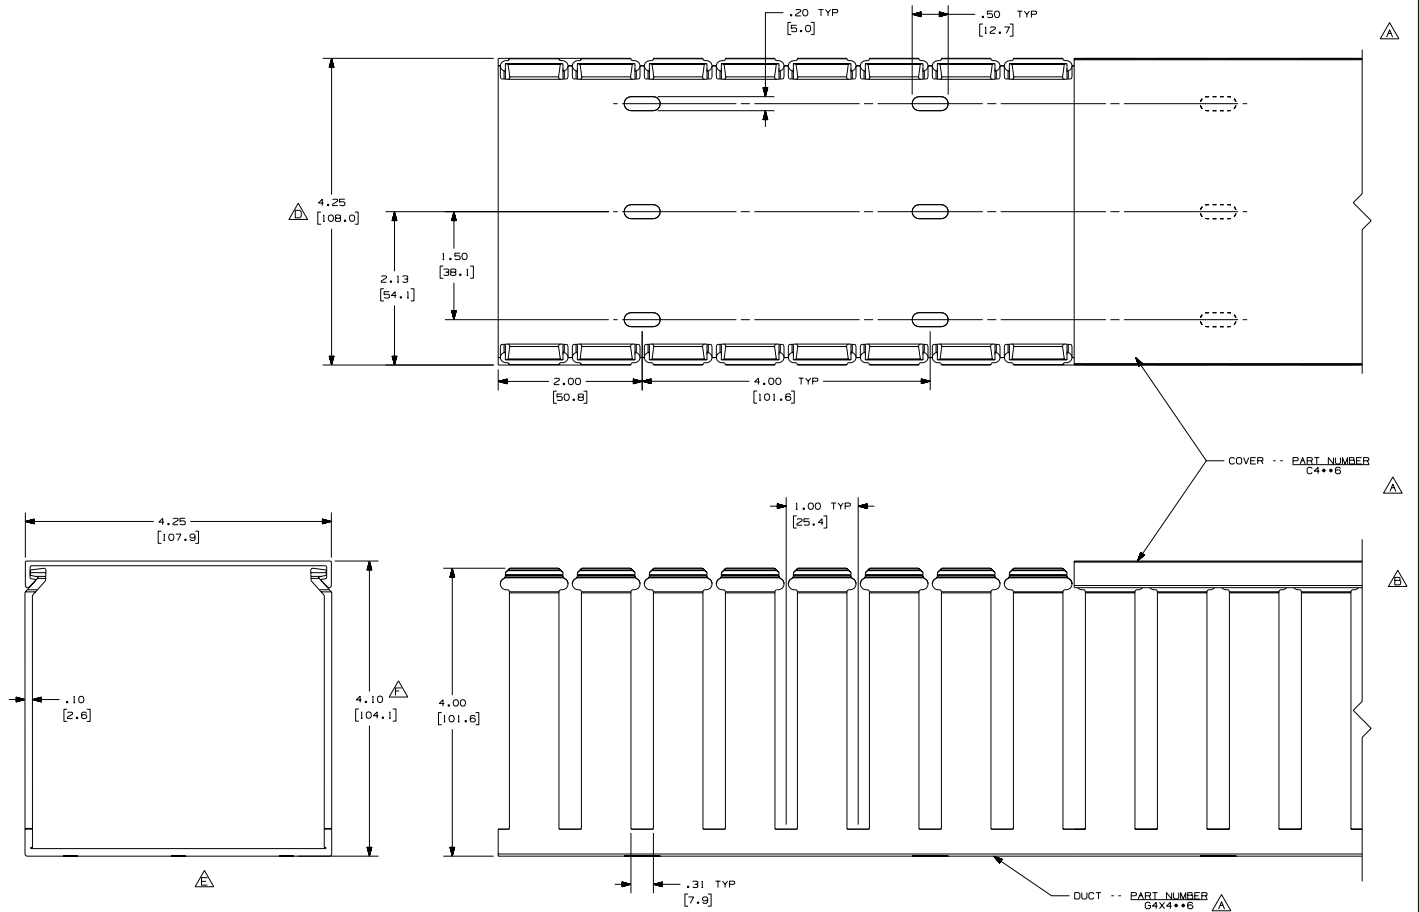

NOTES:

1. ALL DIMENSIONS ARE REFERENCE ONLY.
2. DIMENSIONS IN PARENTHESIS ARE METRIC.
3. THE ** DENOTE COLOR.
4. DUCT AND COVER ARE AVAILABLE IN 6 FT [1828.8] LENGTHS.

REV		DATE	BY	CHK	DESCRIPTION	D11000RE_DC_00C	
1	5-20-04	JCS	MKB		A. ADDED TOP VIEW, NOTES, AND LABELS	DESIGNED BY	JCS
2	7-6-07	JCS	MKB		B. ADDED DIMENSION	DRAWN BY	JCS
3					C. CHANGED DRAWING SIZE	CHECKED BY	JCS
4					D. ADDED DIMENSION	DATE	2-18-03
5					E. SELECTED DIMENSION	MATERIAL	PVC
6					F. CORRECTED DIMENSION	SCALE	FULL
7					G. ADDED LENGTH NOTE	ORDER NO.	36897-717
8					H. CORRECTED DIMENSION	DATE	

D11000RE_DC_00C

PANDUIT CORP., TINLEY PARK, ILLINOIS

WIRING DUCT - TYPE G DUCT WITH COVER
4X4

MARKETING DRAWING

DATE: 2-18-03

MATERIAL: PVC

SCALE: FULL

ORDER NO.: 36897-717

DATE: 2-18-03

DESIGNED BY: JCS

CHECKED BY: JCS