



## PLC4H-S25-TL




- For indoor use
- Used to secure a cable bundle to another surface such as a control panel, communication rack, wall or ceiling
- Design allows for bundling before or after screwing clamp in place
- One-piece construction for consistent performance and reliability
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

▪ Part Number	PLC4H-S25-TL
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Clamp Tie, 15.1", Light-Heavy cross section
▪ Product Type	Cable Ties
▪ Material	Nylon 6.6
▪ Color	Natural
▪ CSA Certified	Yes
▪ UL Listed (File #E56854)	Yes
▪ UL Recognized (File #E56854)	Yes
▪ Length (In.)	15.1
▪ Length (mm)	384
▪ Width (In.)	.300
▪ Width (mm)	7.6
▪ Boss Height (In.)	.265
▪ Boss Height (mm)	6.7
▪ Boss Width (In.)	.500
▪ Boss Width (mm)	12.7
▪ CE Compliant	Yes
▪ Cross Section	Light-Heavy
▪ Locking Style	Locking
▪ Material Flammability Rating	UL 94V-2
▪ Max. Bundle Diameter (In.)	4.00
▪ Max. Bundle Diameter (mm)	102
▪ Max. Continuous Use Temperature	185°F (85°C)
▪ Min. Loop Tensile Strength (Lbs.)	120
▪ Min. Loop Tensile Strength (N)	534

▪ Nominal Hole Diameter (In.)	.260
▪ Nominal Hole Diameter (mm)	6.6
▪ Pricing Description	Clamp Tie, 15.1"L (384mm), 1/4 (M6) Screw, Light-Hvy, Nylon, Natural
▪ Screw Size	1/4
▪ Screw Size Metric	M6
▪ Thickness (In.)	.075
▪ Thickness (mm)	1.9
▪ Tool	GTH, GS4H, GS4EH, PTH, STH2, ST3EH
▪ Min. Order UOM	PC
▪ Min. Order Qty.	250
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

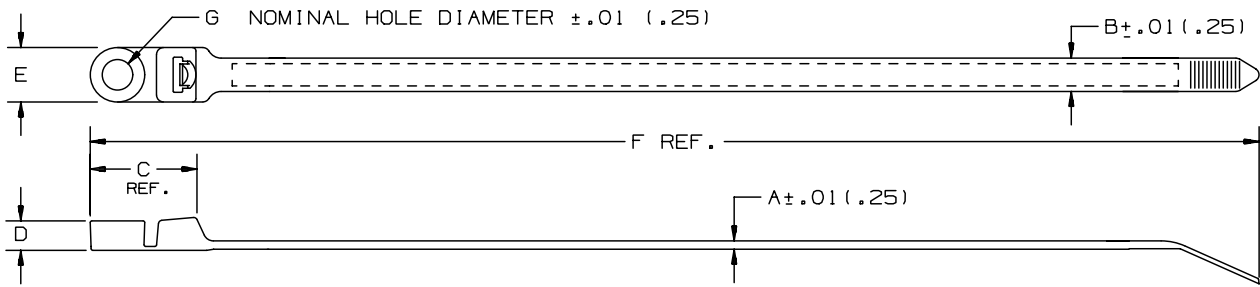

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS-SECTION	RECM. FASTENER	WEIGHT lbs/100pcs (g)
	MIN. in (mm)	MAX. in (mm)											
PLC2H-S25	.18 (4.8)	2.00 (51)	.075 (1.9)	.300 (7.6)	.94 (23.9)	.265 (6.7)	.500 (12.7)	9.0 (229)	.260 (6.6)	120 (534)	HEAVY	1/4 (M6) SCREW	.914 (415)
PLC4H-S25	.18 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.94 (23.9)	.265 (6.7)	.500 (12.7)	15.1 (384)	.260 (6.6)	120 (534)	HEAVY	1/4 (M6) SCREW	1.44 (653)

NOTES:

- \*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

SS\_24665\_XX.PRT

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

PAN-TY LOCKING CLAMP TIE  
PLC HEAVY SERIES

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .0005 (.XXX) ± .0010  
(.XX) ± .02 (1.5) ANGLES ± .0005

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

REMOVED TRADEMARK & CORRECTED MATERIAL NAME

ADDED "NOMINAL HOLE DIAMETER" TO DIMENSION 'G'

CHANGED MAX. BUNDLE DIA. METRIC NUMBERS TO WHOLE NUMBERS

DRAWN BY  
D.L. Moody

DATE  
9-14-89

CHK'D  
HVP

MAT'L:

NYLON 6.6

SCALE  
NONE

DRAWING NO.  
SS-24665

DWG  
SIZE  
A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
7	6/1/05	ERW			24665	7		