



PRT3S-C0




- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Extended release tab permits easy release and re-use where changes are anticipated during development, production or servicing in the field
- One-piece construction for consistent performance and reliability
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation (Light-Heavy cross section ties have a straight tip)

Part Number	PRT3S-C0
RoHS Compliancy Status	Compliant
Part Description	Cable Tie, Releasable, 11.5", Standard cross section
Product Type	Cable Ties
Material	Weather Resistant Nylon 6.6
Color	Black
CSA Certified	Yes
UL Listed (File #E56854)	Yes
UL Recognized (File #E56854)	Yes
Length (In.)	11.5
Length (mm)	292
Width (In.)	.190
Width (mm)	4.8
CE Compliant	Yes
Cross Section	Standard
Head Height (In.)	.219
Head Height (mm)	5.6
Head Width (In.)	.337
Head Width (mm)	8.6
Locking Style	Releasable
Material Flammability Rating	UL 94V-2
Max. Bundle Diameter (In.)	3.00
Max. Bundle Diameter (mm)	76
Max. Continuous Use Temperature	185°F (85°C)
Min. Loop Tensile Strength (Lbs.)	50
Min. Loop Tensile Strength (N)	222

• Pricing Description	Cable Tie, Releasable, 11.5"L (292mm), Standard, Weather Resistant, Black
• Thickness (In.)	.052
• Thickness (mm)	1.3
• Tool	Hand install only
• Min. Order UOM	PC
• Min. Order Qty.	100
• BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

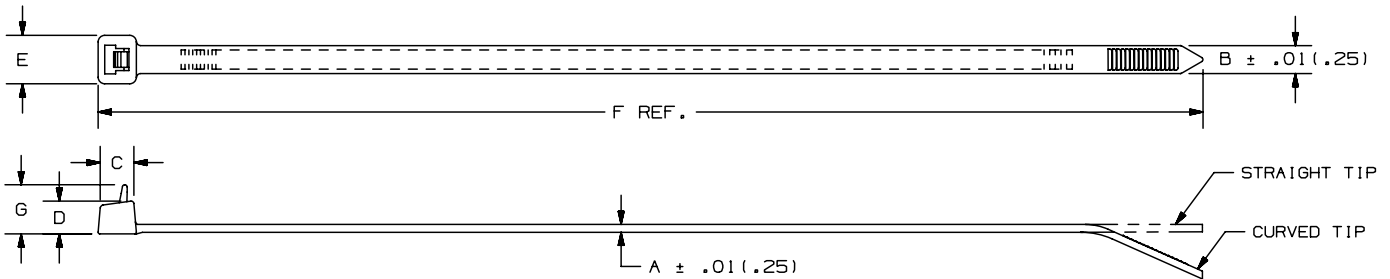

PANDUIT * PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	TIP STYLE	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)											
PRT1S	.06 (1.5)	1.00 (25)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	4.8 (122)	.318 (8.1)	50 (222)	STANDARD	CURVED	.13 (59)
PRT1.5S	.06 (1.5)	1.50 (38)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	6.3 (160)	.318 (8.1)	50 (222)	STANDARD	CURVED	.26 (119)
PRT2S	.06 (1.5)	1.88 (48)	.052 (1.3)	.190 (4.8)	.258 (6.5)	.219 (5.6)	.316 (8.0)	7.4 (188)	.318 (8.1)	50 (222)	STANDARD	CURVED	.29 (132)
PRT3S	.06 (1.5)	3.00 (76)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	11.5 (292)	.318 (8.1)	50 (222)	STANDARD	CURVED	.45 (205)
PRT4S	.06 (1.5)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.219 (5.6)	.337 (8.6)	14.5 (368)	.318 (8.1)	50 (222)	STANDARD	CURVED	.56 (255)

NOTES:
* 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATIONS FOR PACKAGE SIZE AND PART COLOR.

										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.					
										<h1>PANDUIT</h1> CORP. TINLEY PARK, ILLINOIS PAN-TY CABLE TIES RELEASABLE SERIES					
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .----- (.XXX) ± .020(.51) (.XX) ± .02(.5) ANGLES ± .-----			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
--	-----	---	CORRECTED MATERIAL NAME			----	--	DRAWN BY CEW		MAT'L: NYLON 6.6		SCALE NONE			
13	6/22/05	ERW	ADDED TOLERANCE TO DIMENSIONS 'A' & 'B'			4472	13	DATE 7-31-85		DRAWING NO. SS-4472		DWG A			
REV	DATE	BY	CHK	DESCRIPTION			ECN	-	R	CUST	SUP	SHEET 1 OF 2 SIZE			
												HVP			