



ILT4LH-TL0




- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Parallel-entry cable tie that threads like a belt (180° entry)
- Low profile head avoids snags and reduces overall bundle size
- 35% lower head height than conventional 90° ties
- Parallel-entry limits exposure to sharp edges and protects workers' arms/hands
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

• Part Number	ILT4LH-TL0
• RoHS Compliancy Status	Compliant
• Part Description	<i>Belt-Ty™</i> In-Line Cable Tie, 14.8", Light-Heavy cross section
• Product Type	Cable Ties
• Material	Weather Resistant Nylon 6.6
• Color	Black
• CSA Certified	No
• UL Listed (File #E56854)	No
• UL Recognized (File #E56854)	No
• Length (In.)	14.8
• Length (mm)	376
• Width (In.)	.300
• Width (mm)	7.6
• CE Compliant	Yes
• Cross Section	Light-Heavy
• Head Height (In.)	.250
• Head Height (mm)	6.4
• Head Width (In.)	.515
• Head Width (mm)	13.1
• Locking Style	Locking
• Material Flammability Rating	UL 94 HB
• Max. Bundle Diameter (In.)	4.00
• Max. Bundle Diameter (mm)	102
• Max. Continuous Use Temperature	185°F (85°C)
• Min. Loop Tensile Strength (Lbs.)	120
• Min. Loop Tensile Strength (N)	534

• Pricing Description	Cable Tie, In-Line, 14.8"L (376mm), Light-Heavy, Weather Resistant, Black
• Thickness (In.)	.075
• Thickness (mm)	1.9
• Tool	GTH, GS4H, GS4EH, PTH, STH2, ST3EH
• Min. Order UOM	PC
• Min. Order Qty.	250
• BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

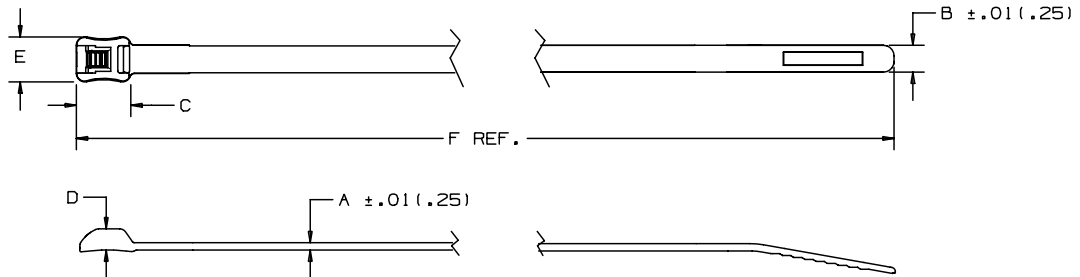

PANDUIT PART NO. *	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE LBS. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs/100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
ILT2S	.188 (4.8)	1.88 (47.8)	.052 (1.3)	.190 (4.8)	.389 (9.9)	.140 (3.6)	.316 (8.0)	8.30 (211)	50 (222)	STANDARD	CURVED	.284 (129)
ILT3S	.188 (4.8)	3.00 (76.2)	.052 (1.3)	.190 (4.8)	.389 (9.9)	.140 (3.6)	.316 (8.0)	11.5 (292)	50 (222)	STANDARD	CURVED	.385 (175)
ILT4S	.188 (4.8)	4.00 (101.6)	.052 (1.3)	.190 (4.8)	.389 (9.9)	.140 (3.6)	.316 (8.0)	14.7 (373)	50 (222)	STANDARD	CURVED	.490 (222)
ILT4LH	.200 (5.1)	4.00 (101.6)	.075 (1.9)	.300 (7.6)	.600 (15.2)	.250 (6.4)	.515 (13.1)	14.8 (376)	120 (534)	LIGHT HEAVY	CURVED	1.132 (514)
ILT6LH	.200 (5.1)	6.00 (152.4)	.075 (1.9)	.300 (7.6)	.600 (15.2)	.250 (6.4)	.515 (13.1)	21.2 (538)	120 (534)	LIGHT HEAVY	CURVED	1.610 (731)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS											
										PANDUIT	SS-27217-ILT_04.PRT
											CORP. TINLEY PARK, ILLINOIS
										BELT-TY INLINE-TIE CABLE TIES	
										ILT SERIES	
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± --- (.XXX) ± .020(.51) (.XX) ± .02(.5) ANGLES ± ----	
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
										DRAWN BY	MAT'L:
										CJW	
										DATE	SCALE
										6-9-99	NONE
										CHK'D	DRAWING NO.
										JKG	SS-27217
											DWG SIZE
											A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
7	8/10/04	MJVE		.515 WAS .475 ON ILT4/6LH DIM E	27217		7	