




BF2M-C




- For indoor use
- Used to fasten and identify bundles at the same time
- Stainless steel locking barb provides consistent performance, reliability and infinite adjustability through entire bundle range
- Can be marked with *PANDUIT* Marker Pens or custom imprinted with text, symbols or trademarks available using *PANDUIT* Custom Hot Stamping Service
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

▪ Part Number	BF2M-C
▪ RoHS Compliancy Status	Compliant
▪ Part Description	Marker Tie with metal barb, Flag, 8.3", Miniature cross section
▪ Product Type	Cable Ties
▪ Material	Nylon 6.6
▪ Color	Natural
▪ CSA Certified	Yes
▪ UL Listed (File #E56854)	No
▪ UL Recognized (File #E56854)	Yes
▪ Length (In.)	8.3
▪ Length (mm)	211
▪ Width (In.)	.095
▪ Width (mm)	2.4
▪ CE Compliant	Yes
▪ Cross Section	Miniature
▪ Head Height (In.)	.156
▪ Head Height (mm)	4.0
▪ Head Width (In.)	.182
▪ Head Width (mm)	4.6
▪ Locking Style	Locking
▪ Marker Type	Flag
▪ Marker Write-On Area (In.)	.36 x .81
▪ Marker Write-On Area (mm)	9.1 x 20.6
▪ Material Flammability Rating	UL 94V-2
▪ Max. Bundle Diameter (In.)	2.00

▪ Max. Bundle Diameter (mm)	51
▪ Max. Continuous Use Temperature	185°F (85°C)
▪ Min. Loop Tensile Strength (Lbs.)	18
▪ Min. Loop Tensile Strength (N)	80
▪ Pricing Description	Marker Tie, Flag, 8.3"L (211mm), Miniature, Nylon, Natural
▪ Thickness (In.)	.046
▪ Thickness (mm)	1.2
▪ Tool	GTS, GTSL, GS2B, PTS, PPTS, STS2
▪ Min. Order UOM	PC
▪ Min. Order Qty.	100
▪ BOM Qty. (# of Pkgs.)	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

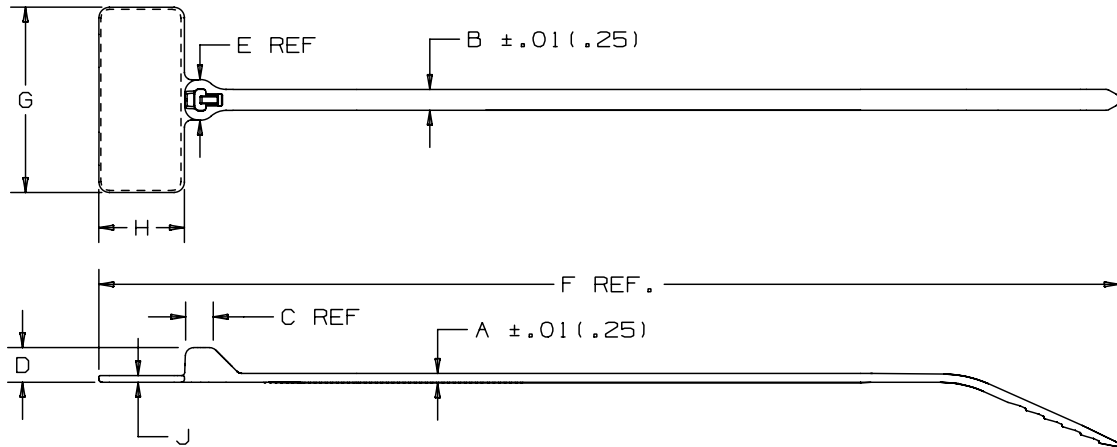

* PANDUIT PART NUMBER	BUNDLE DIA.		A	B	C	D	E	F	G	H	J	WRITE-ON AREA in. (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./ 100 pcs. (g)
	MIN. in. (mm)	MAX. in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)				
BF1M	.06 (1.5)	0.90 (23)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	4.6 (117)	.829 (21.1)	.381 (9.7)	.03 (.76)	.36 x .81 (9.1 x 20.6)	18 (80)	MINIATURE	.09 (.42)
BF2M	.06 (1.5)	2.0 (51)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	8.3 (211)	.829 (21.1)	.381 (9.7)	.03 (.76)		18 (80)	MINIATURE	.16 (.71)

NOTES:

1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

DOME-TOP Barb Ty CABLE TIES
BF SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .01 (.25) (XXX) ± .020 (.51)
(.XX) ± .02 (.51) ANGLES ± .01

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
TJ

MAT'L:

SCALE
NONE

DATE
5/14/97

NYLON 6.6

DRAWING NO.
BT-0249

DWG
A
SIZE

CHK'D
JVL

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
6	4/19/05	ERW		METRIC CONVERSION CORRECTIONS	0249	6		