
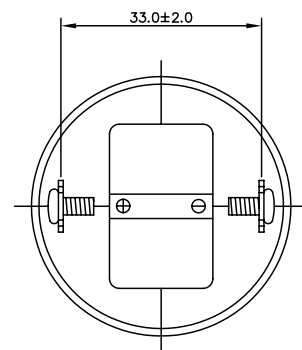
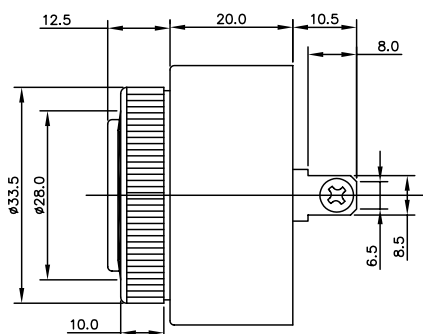


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	24	Vdc
OPERATING VOLTAGE RANGE	10 ~ 48	Vdc
RATED CURRENT (MAX)	8	mA
MINIMUM SPL @ 10 cm.	81	dBa
RESONANT FREQUENCY	1,900±500	Hz
TONE OR PULSE RATE	CONTINUOUS	0 PULSE PER SECOND
OPERATING TEMPERATURE	-30 ~ +85	°C
STORAGE TEMPERATURE	-40 ~ +85	°C
HOUSING MATERIAL	NYLON UL-94-V-0	—
TERMINAL MATERIAL	TIN-PLATED TAPPED SCREW	—
WEIGHT	29.5	grams

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	2/13/04	
A	ADDED IP RATING	4/15/05	E. P.

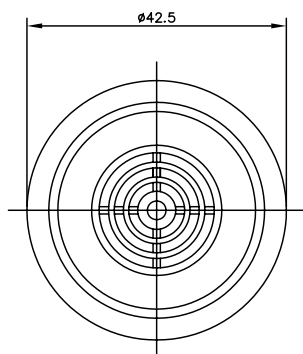

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS IP67 RATED.

THIS PART IS UL RECOGNIZED
IN THE USA AND CANADA.

FILE NAME
AI-4219-P-C48.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ± 0.5 AND
ANGLES ARE $\pm 3^\circ$.

APPROVALS	DATE
DRAWN <i>R.A.C.</i>	2/04
APPROVED <i>R.W.</i>	2/04
DO NOT SCALE DRAWING	



projects®
unlimited

Dayton , Ohio

PIEZO AUDIO INDICATOR
AI-4219-P-C48

SIZE	A
------	---

DRAWING NO.
AI-4219-P-C48

DO NOT SCALE DRAWING

SCALE: N.T.S.

SHEET 1 OF 1