


SPECIFICATIONS

PARAMETERS	VALUES	UNITS
Rated Voltage	12	Vdc
Operating Voltage Range	6 ~ 28	Vdc
Rated Current (max.)	6	mA
Typical Sound Pressure Level @ 10 cm	88	dBa
Output Frequency	2900±500	Hz
Pulse Rate	3.2 ± 20%	Hz
Operating Temperature Range	-30 ~ +85	°C
Storage Temperature Range	-40 ~ +95	°C
Housing Material	ABS Black	
Terminal	Nickel Plated Tabs	
Weight	37	g


REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	04/16/02	

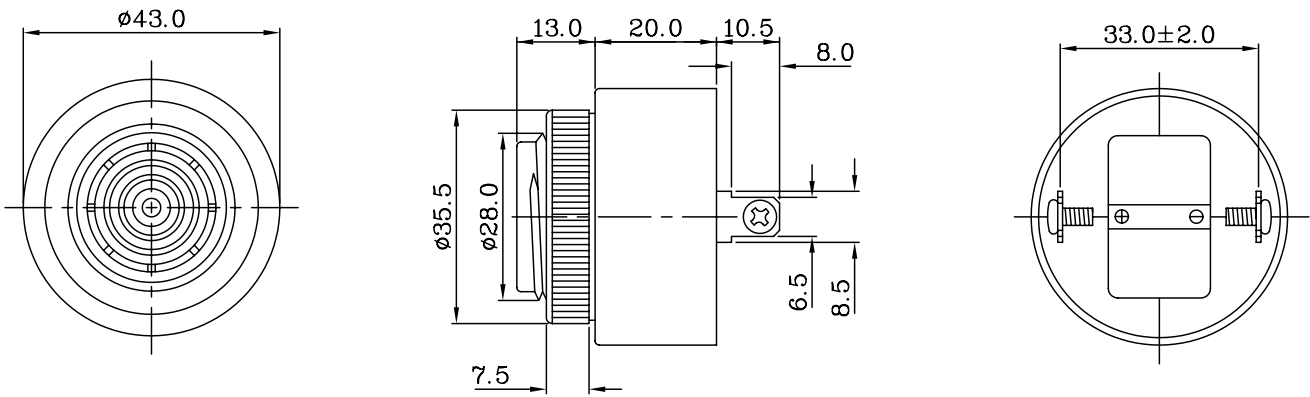

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:                  FRACTIONS DECIMALS ANGLES  <math>\pm</math> .XX <math>\pm</math> 0.5 <math>\pm</math> —                  .XXX <math>\pm</math> —</small>		 Dayton, Ohio	
APPROVALS: DRAWN <i>RABL</i> DATE 04/02		PIEZO AUDIO INDICATOR AI-381	
CHECKED: APPROVED <i>S. J.</i> DATE 04/16/02		SIZE: A	MATERIAL: DRAWING NO. AI381.DWG
DRAWING NAME: AI381		SCALE: N/A	MAX. WT.: SHEET 1 OF 1
DO NOT SCALE DRAWING			