Mallory Sonalert Products Inc.

Part # PB-12N23P-12

Revision A

Sales Outline Drawing

OBSOLETE- USE PB-12N23P-12Q

Specifica

Oscillation Frequency (Hz)	2300 ± 400
Operating Voltage (Vdc)	9.0 ~ 15
Rated Voltage (Vdc)	12
Current Consumption Max. (mA)	50 at Rated Voltage
Sound Pressure Level Min. (dB)	85 at 10cm at Rated Voltage
Tone/Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Housing	PPO plastic resin (Color: Black)
Leading Pin	Tin Plated Brass
Weight (Grams)	1.8
Options	For other options contact factory

PS: Vp-p = 1/2duty, square wave

Dimensions: (units: mm)

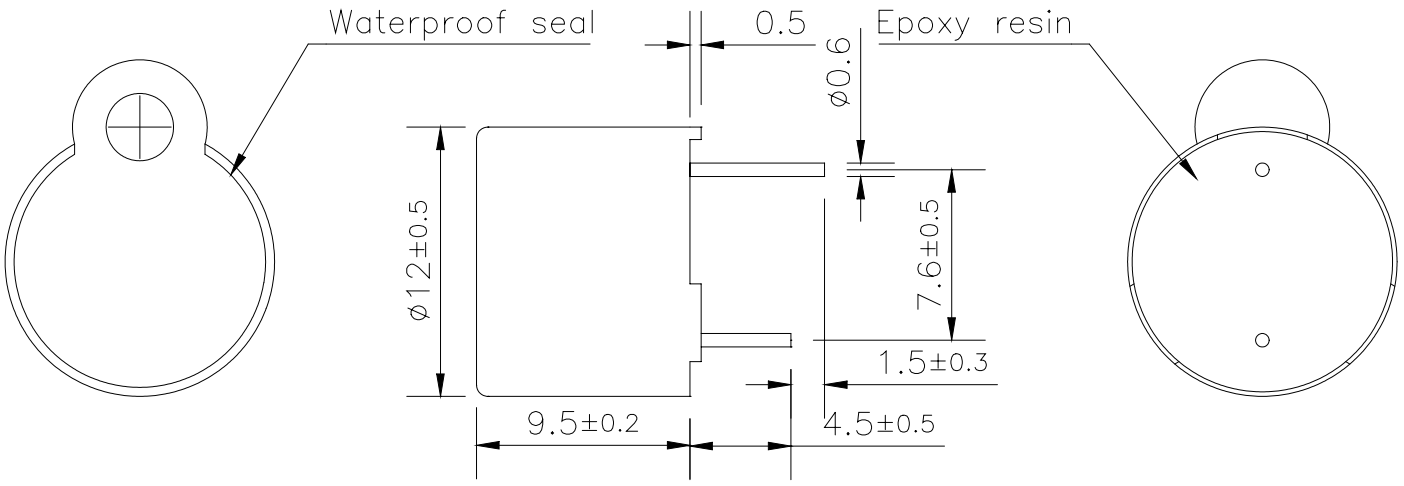

4411 South High School Road, Indianapolis, Indiana 46241 USA ● Phone (317) 612-1000 ● Fax (317) 612-1010 ● http://www.mallory-sonalert.com

Downloaded from Elcodis.com electronic components distributor