


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
Rated Voltage (Square Wave)	1.5	Vp-p
Operating Voltage	1 ~ 2	Vp-p
Rated Current (typ.)	40	mA
Typical Sound Pressure Level @ 10 cm., 2048 Hz	80	dBA
Resonant Frequency	2000 ~ 2500	Hz
Operating Temperature Range	-20 ~ +70	°C
Storage Temperature Range	-30 ~ +85	°C
Housing Material	Noryl	
Terminal	Tin-Plated Copper Pins	
Weight	7	g


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	5/1/02	
A	REVISED TEMP. RANGE ETC.	12/31/02	S.J.

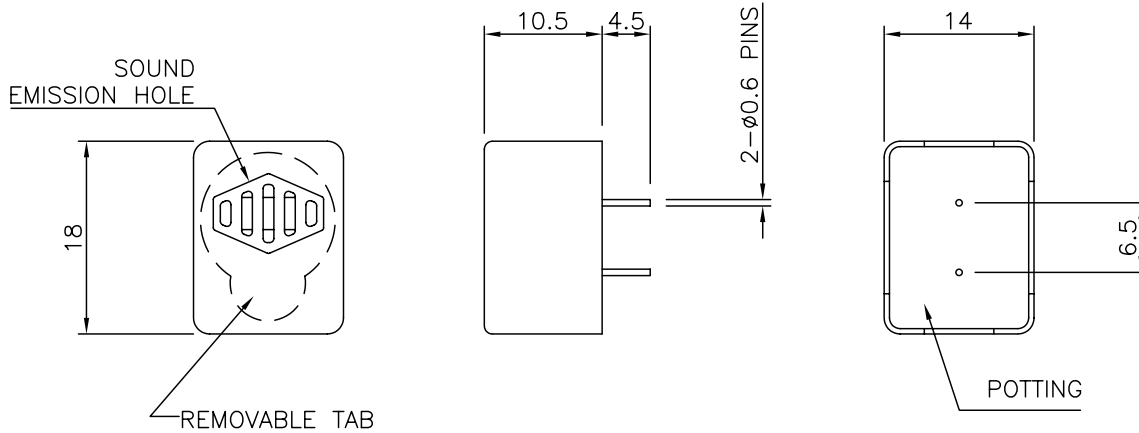

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME  
AT-201.DWG

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± 0.5 ± .XXX ±		 Dayton, Ohio	
APPROVALS		DATE	
DRAWN <i>RABL</i>		5/02	
CHECKED			
APPROVED <i>S.J.</i>		5/1/02	
DO NOT SCALE DRAWING			
AUDIO TRANSDUCER AT-201			
SIZE A	MATERIAL	DRAWING NO. AT-201	
SCALE N/A	MAX. WT.	SHEET 1 OF 1	