CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

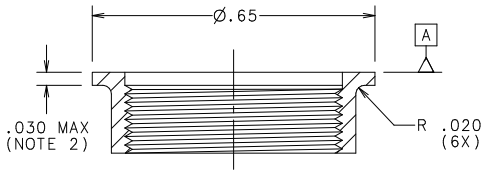

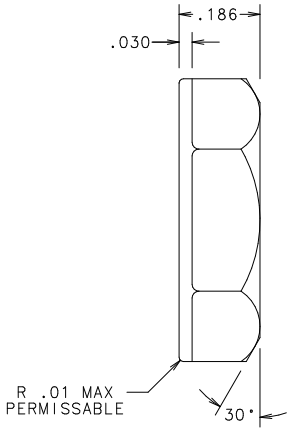

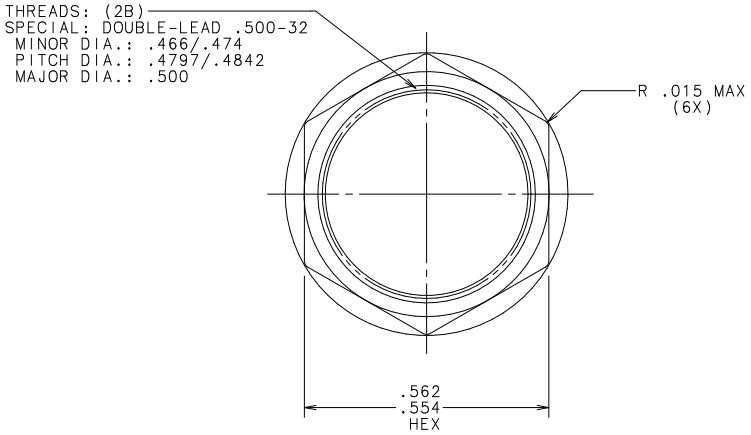

NOTES:

1. NUT IS TO ACCEPT A TORQUE OF 18 LB.-IN. WITHOUT CRACKING OR STRIPPING
2. THE STARTING POINT OF THE LEAD THREAD CANNOT EXCEED .030 FROM SURFACE [A].
3. "FLASH EXTENDING ABOVE SURFACE [A] CANNOT EXCEED .006 HIGH AND .004 THICK.

PACKAGING NOTES:

PLACE IN TOTE -580599 LINED WITH POLY BAG -890-750
LABEL TOTE WITH -914-796 PRINTED PER GENERAL LABEL
SPEC. LS-000003.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
1	057295	RYNITE 415 HP	2.25	LB

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.
DENOTES CRITICAL CHARACTERISTICS.
DENOTES CPK DIMENSIONS.-MINIMUM CPK VALUE
DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
DENOTES CP DIMENSIONS.-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

MATL SPEC
FINISH
COPIES TO 1 9 18 2 10 19 3 12 20 4 13 21 5 14 23 6 15 33 7 16 43 8 17 53

	NAME	DATE
DRW	KAM	1/23/97
CHK		
APPD		

SCALE 4:1
SUPER DRW
RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±1/64
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE HEX NUT, MOLDED

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION M
DRWG. NO. 903-097

LTR	REVISION	CHK	APD
K	39068C-REVISE & REDRAWN IN NEW STRUCTURE 4/16/98 KAM		
L	39682C-CHG. 0.845 TO .7896 03/22/99 PJM		
M	80635C-CHG .7896 TO 2.25 06/22/00 PJM		

UNCONTROLLED DOCUMENT

Downloaded from Elcodis.com electronic components distributor