These easy-to-mount, multipurpose screw type terminals are a practical, low-cost alternative to PC screw type edge connectors, barrier blocks, terminal boards and terminal strips. Steadfast and easy to install, will accommodate solid or stranded wire, crimp type terminals or lugs. Multi-placement of these low-profile terminals make them ideally suited for high density packaging. Supplied unassembled or with screw installed and captivated.

#### **PRINCIPAL FEATURES**

- Low profile
- · Stable, no-rock design with exclusive anti-rotational feature
- · Easily mounts with four legs into pre-drilled or punched holes
- Accepts 14-22 AWG solid or stranded wire, crimp type terminals or lugs
- · Ideally suited for high-density packaging
- Available in horizontal or vertical mounting
- · Space-saving and time saving
- · Easy accessibility for PC board testing
- · Binding screw is positioned above board level to avoid wicking during wave soldering
- · Terminals are made of Brass with Tin Plate
- · Supplied with a combination drive 6-32 binding head screw
- · Color coded screws available (add color screw suffix to Cat. No.)

#### CAT. NO. COLOR SUFFIX XXXX


#### **COLOR SELECTION:** Select desired screw terminal and add color suffix to the screw terminal Cat. No.

HEAD COLOR	SUFFIX
RED	-2
BLACK	-3
WHITE	-4
BLUE	-5
GREEN	-6
YELLOW	-7
NICKEL	none



# **SNAP-IN**

PC MOUNT



CAT. NO. 7779 (Supplied Less Screw)

CAT. NO. 7690 (Screw Supplied Unassembled)

CAT. NO. 7692 (Screw Installed & Captivated)


#### **HORIZONTAL TYPE**


**SPECIFICATIONS** Rated: 15 Amps Terminal:

.032 (.81) thick Brass, Tin Plate **Binding Head Screw:** 

Brass, Nickel Plate









PC MOUNT


CAT. NO. 7781 (Supplied Less Screw)

CAT. NO. 8190 (Screw Supplied Unassembled)

CAT. NO. 7700 (Screw Installed & Captivated)







CAT. NO. 7780 (Supplied Less Screw)

CAT. NO. 7691 (Screw Supplied Unassembled)

CAT. NO. 7693 (Screw Installed & Captivated)

#### **VERTICAL TYPE**

**SPECIFICATIONS** Rated: 15 Amps


Terminal:

.032 (.81) thick Brass, Tin Plate **Binding Head Screw:** 

Brass, Nickel Plate



Color coded screws available (add color screw suffix to Cat. No.)






CAT. NO. 7782 (Supplied Less Screw)

CAT. NO. 8191 (Screw Supplied Unassembled)

CAT. NO. 7701 (Screw Installed & Captivated)




Tel (718) 956-8900 • Fax (718) 956-9040



#### **SPECIFICATIONS** Rated: 15 Amps Terminal:

.032 (.81) thick Brass, Tin Plate **Binding Head Screw:** Brass, Nickel Plate

Color coded screws available (add color screw suffix to Cat. No.)



45°



**PC MOUNT** 



CAT. NO. 7783 (Supplied Less Screw)

CAT. NO. 8189 (Screw Supplied Unassembled) CAT. NO. 7702 (Screw Installed & Captivated)

KEYSTONE

Rohs Compliant - ISO 9001 CERTIFIED

CAT. NO. 7699 (Screw Installed & Captivated)

#### **COLOR CODED SCREW TERMINAL SELECTION GUIDE**

# · Available for screw terminals where noted.

#### **Color Coded Screw Terminals** provide:

- Quick identification
- · Visibility for field service troubleshooting

#### **SPECIFICATIONS**

**Combination Binding Head:** Standard screw is Brass,

Nickel Plate. For painted, color head, add suffix as shown.





#### COLOR SELECTION:

Select desired screw terminal and add color suffix to the screw terminal Cat. No.

HEAD COLOR	SUFFIX
RED	-2
BLACK	-3
WHITE	-4
BLUE	-5
GREEN	-6
YELLOW	-7
NICKEL	none

CAT. NO. COLOR SUFFIX XXXX



Refer to page 123 for color screws only

#### **LOW PROFILE - PC SCREW TERMINALS**

These easy to mount screw terminals are ideally suited for high density packaging and are available unassembled or with the screw installed and captivated. They are a practical alternative to PC screw type edge connectors, barrier blocks, terminal boards and terminal strips.

**SPECIFICATIONS** 

**Binding Head Screw:** 


Brass, Nickel Plate

Rated: 15 Amps

Tin Plate

#### PRINCIPAL FEATURES

- Low profile
- Stable, no-rock design
- Easily mounts in pre-drilled or stamped holes
- Accepts 12-22 AWG solid or stranded wire, crimp type terminals or lugs
- · Space saving and time saving
- · Combination drive, binding head screw
- · Color coded screws available (add color screw suffix to Cat. No.)

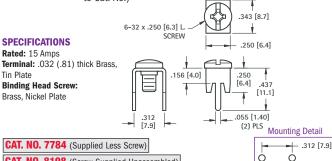

CAT. NO. 7784 (Supplied Less Screw)


CAT. NO. 8198 (Screw Supplied Unassembled)

.067 [1.70] CAT. NO. 7778 (Screw Installed & Captivated) DIA. (2) PLS

A practical, low-cost alternative to PC screw type edge connectors, barrier blocks, terminal boards and terminal strips. Supplied unassembled or with screw installed and captivated.

#### PRINCIPAL FEATURES

- Low profile
- Stable, no-rock design with exclusive anti-rotational feature
- Ideally suited for high-density packaging
- Space saving and time saving
- · Combination drive, binding head screw
- Color coded screws available (add color screw suffix to Cat. No.)



CAT. NO. 7785 (Supplied Less Screw)

Terminal: .032 (.81) thick Brass

**SPECIFICATIONS** 

**Binding Head Screw:** 

Brass, Nickel Plate

Rated: 15 Amps

CAT. NO. 8195 (Screw Supplied Unassembled)

CAT. NO. 7775 (Screw Installed & Captivated)

### Mounting Detail — .197 [5.0] 0 .062 [1.57] DIA. (4) PLS

#### 30 AMP - PC SCREW TERMINALS

A practical, low-cost alternative to PC screw type edge connectors, barrier blocks, terminal boards and terminal strips. Supplied unassembled or with screw installed and captivated.

**SPECIFICATIONS** 

**Binding Head Screw:** 

CAT. NO. 8199 (Screw Installed & Captivated)


Brass, Nickel Plate

Rated: 30 Amps

Tin Plate

#### PRINCIPAL FEATURES

- · Compact, heavy duty design
- Six snap-in legs for total stability
- Serrated top surface secures connection
- Combination drive, binding head screw
- to Cat. No.)

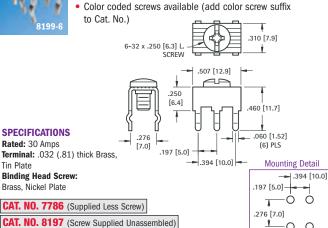


**HEAVY DUTY** This heavy duty screw terminal has been designed to carry 30 Amps, while maintaining a space saving compact profile, making it ideal for high density packaging.




#### **PRINCIPAL FEATURES**

- · Compact, heavy duty design
- Six snap-in legs for total stability
- · Serrated top surface secures connection

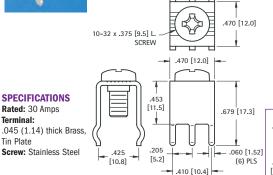

CAT. NO. 7787 (Supplied Less Screw)

CAT. NO. 8196 (Screw Supplied Unassembled)



**55** 

Tel (718) 956-8900 • Fax (718) 956-9040

(800) 221-5510 • kec@keyelco.com Downloaded from **Elcodis.com** electronic components distributor

KEYSTON Rohs Compliant - ISO 9001 CERTIFIED

-O O

.076 [1.93] DIA. (6) PLS

Tin Plate

CAT. NO. 7790 (Supplied Less Screw) CAT. NO. 7689 (Screw Supplied Unassembled) CAT. NO. 7695 (Screw Installed & Captivated)

3.50

SCREW

M3 HORIZONTAL

11.50


7.90

**SPECIFICATIONS** 

Rated: 15 Amps Terminal: 0.81 thick Brass, Tin Plate

**METRIC - "SNAP-IN" PC SCREW TERMINALS** 

Binding Head Screw: Brass,



М3 VERTICAL

CAT. NO. 7788 (Supplied Less Screw)

437 [11.1]

CAT. NO. 7698 (Screw Supplied Unassembled) CAT. NO. 7696 (Screw Installed & Captivated)

#### NOTE: All dimensions are in millimeters LOW PROFILE SCREW TERMINALS

These sturdy, low cost screw terminals, feature an anti-rotation tab for use with spade terminals. They are available with the screw installed and captivated, the screw unassembled or without a screw.

#### **PRINCIPLE FEATURES**

- · Easy to connect using solid or stranded wire, crimp lugs or terminals
- Anti-rotation tab for use with spade terminals
- · Supplied with screw installed and captivated, with screw unassembled, or without screw

Stainless steel screw will not wick



Mounting Detail

J 5.00 ⊩


0

1.85 DIA. (4) PLS

7.00

10-32





#### **SPECIFICATIONS**

8-32

Rated: 15 Amps


SCREW TERMINALS

Terminal: .032 (.81) thick Brass, Tin Plate Screw: Combination drive, Stainless Steel

CAT. NO. 1284 (Supplied Less Screw)

CAT. NO. 1298 (Screw Supplied Unassembled)


CAT. NO. 1201 (Screw Installed & Captivated)

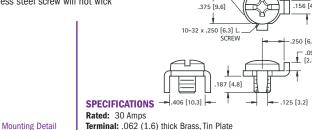

Screw: Combination drive, Stainless Steel

CAT. NO. 1293 (Supplied Less Screw)

CAT. NO. 1299 (Screw Supplied Unassembled) CAT. NO. 1202 (Screw Installed & Captivated)



#### **HEAVY DUTY SCREW TERMINALS**

These heavy duty terminals are available with the screw installed or unassembled, and feature easy access to connect solid or stranded wire, crimp type lugs or terminals.


#### **PRINCIPLE FEATURES**

∠ <sub>187</sub> [4.7] DIA

- Anti-rotation tab for use with spade terminals
- Below the board notched leg, to facilitate mechanical and solder connections
- · Easy to connect using solid or stranded wire, crimp lugs or terminals
- Available with screw installed, unassembled, or without screw





10-32



**SPECIFICATIONS** Rated: 15 Amps Terminal: .064 (1.6) thick Brass, Tin Plate Screw: Brass, Nickel Plate

CAT. NO. 1205 (Supplied Less Screw) CAT. NO. 1207 (Screw Supplied Unassembled) CAT. NO. 1209 (Screw Installed)






**Terminal:** .064 (1.6) thick Brass. Tin Plate Screw: Steel, Nickel Plate

**SPECIFICATIONS** 

Rated: 30 Amps

CAT. NO. 1206 (Supplied Less Screw) CAT. NO. 1208 (Screw Supplied Unassembled) CAT. NO. 1283 (Screw Installed)



KEYSTON

# Rohs Compliant - ISO 9001 CERTIFIED

#### SNAP-FIT SCREW TERMINALS

(Screw Installed & Captivated)


CAT. NO. 1215



Tin Plate


(Screw Installed & Captivated)

CAT. NO. 1248



.125 [3.2]





∠ .187 [4.7] DIA.

(Screw Installed & Captivated)

CAT. NO. 1232

## **SPECIFICATIONS**

Terminal: .020 (.51) thick Spring Steel, Tin Plate

Screw: Steel, Zinc Plate, (Screw Installed & Captivated)

CAT. NO. 1272




#### **SPECIFICATIONS**

Terminal: .020 (.51) thick Spring Steel, Tin Plate Screw: Steel, Zinc Plate,

(Screw Installed & Captivated)

CAT. NO. 1273

# **BINDING POST TERMINALS (RIVET TYPE)**

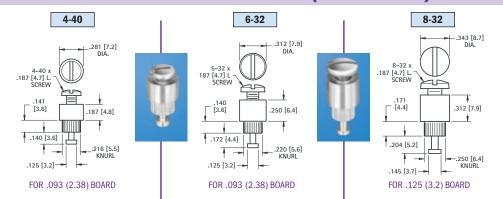

#### **SPECIFICATIONS**

Terminal: Brass, Tin Plate Screw: Steel. Zinc Plate (Screw Supplied Unassembled) **Mounting Hole:** .220 (5.6)

CAT. NO. 1537

#### **SPECIFICATIONS**

Terminal: Brass, Tin Plate Screw: Steel, Zinc Plate (Screw Supplied Unassembled) Mounting Hole: .225 (5.7)

CAT. NO. 1535


#### **SPECIFICATIONS**

Terminal: Brass, Tin Plate Screw: Steel, Zinc Plate (Screw Supplied Unassembled) Mounting Hole: .255 (6.5)

CAT. NO. 1536

#### **MINI BINDING POST**

M2.5



#### **SPECIFICATIONS**

Terminal: Brass, Tin Plate Screw: Steel, Zinc Plate (Screw Supplied Unassembled) Mounting Hole: .047 (1.2)

CAT. NO. 8730

Tel (718) 956-8900 • Fax (718) 956-9040

KEYSTONE Rohs Compliant - ISO 9001 CERTIFIED

www.keyelco.com