
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS LINLINITED, INC. ANY USE OR REPRODUCTION. IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2003, Projects Unlimited Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
DIRECTIVITY	OMNI	_
SENSITIVITY (0 dB=1 V/Pa)	-40±3	dB
STANDARD OPERATING VOLTAGE	2.0	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION MAX	0.5	mA
IMPEDANCE	2.2	k0hm
SIGNAL TO NOISE RATIO	58	dB
TERMINAL	PIN	_
INTERNAL CAPACITOR	33	pF

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	5/31/02	
Α	REDREW DRAWING & ADDED SCREEN	12/12/02). (j
В	REVISED TO NEW TEMPLATE	12/22/03	R.V.
С	REVISED INTERNAL CAPACITOR	12/15/04	R.W.
D	REVISED DIMENSION SIZE AND STYLE	02/22/06	B.R.

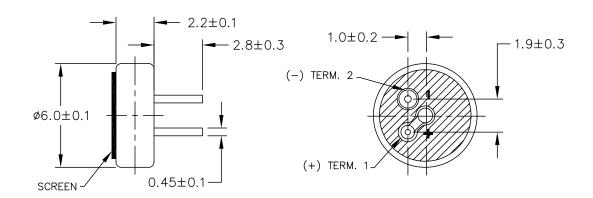

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

APPROVALS	
DRAWN RABL	
APPROVED S. J.	Ť

DO NOT SCALE DRAWING

OTHERWISE SPECIFIED: IONS ARE IN TERS, TOLERANCES ARE ±0.5 AND ARE ±3.

projects ® unlimited

Dayton , Ohio

ELECTRET CONDENSER MICROPHONE DATE 5/02 DRAWING NO.
POM-2240P SIZE 6/02

FILE NAME POM-2240P.DWG

SCALE: N.T.S.

SHEET 1 OF